

ECA 100 ipro KVZC



Short description

Two-step small room fan with electrical internal shutter, adjustable start delay and overrun time, DN 100

Application examples

Bathroom, WC, Storage room, Larder, Cellar


Article number 0084.0206

Technical data

Model	Adjustable start delay and overrun time
Air flow volume	78 m ³ /h / 92 m ³ /h
Speed controllable	–
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	10 W / 13 W
I _{max}	0,08 A
Degree of protection	IP X5
Mains cable	5 / 1,5 mm ²
Installation site	Ceiling / Wall
Type of installation	Surface-mounted
Installation position	any
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	0,7 kg
Shutter	integrated
Type of shutter	electrical
Nominal size	100 mm
Airstream temperature at I _{Max}	40 °C
Overrun time	0 min / 8 min / 17 min / 25 min
Start delay	0 s / 50 s / 90 s / 120 s
Sound pressure level	27 dB(A) / 32 dB(A) (Distance 3 m, Free-field conditions)
Range	A
EAN	4012799842064


ECA 100 ipro KVZC

Characteristic curve

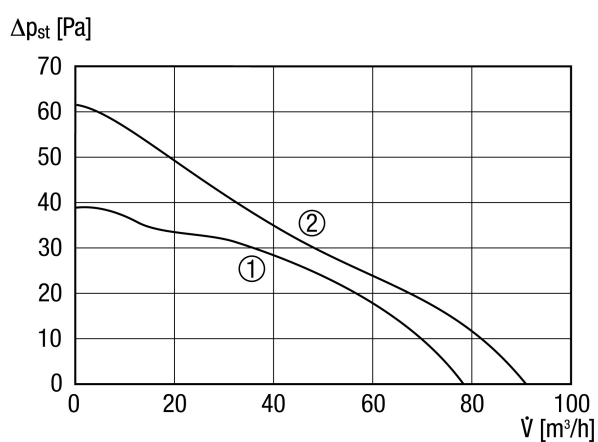

- ① Performance level 1
- ② Performance level 2

Dimensioned drawing [mm]

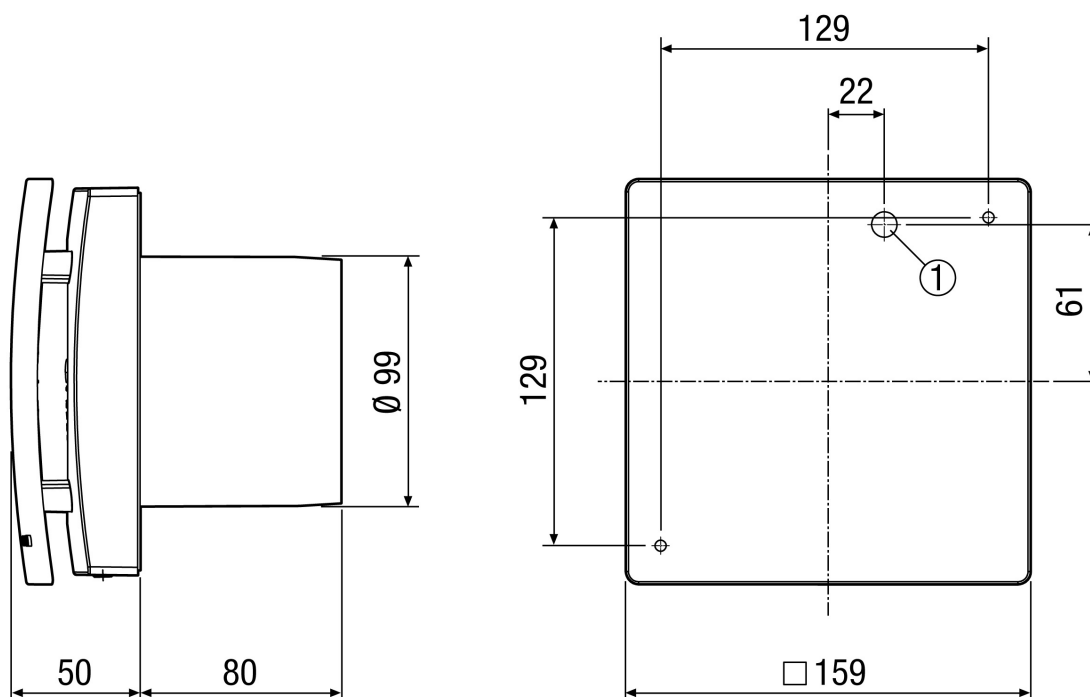

- ① Cable entry