Gelbox; Branch; for cables; with gel; 221, 2x73 Series; max. 4 mm² connectors; max. 4 mm² connectors; max. 4 mm² connectors; max. 4

thout splicing connectors; Size 3; gray

https://www.wago.com/207-1333












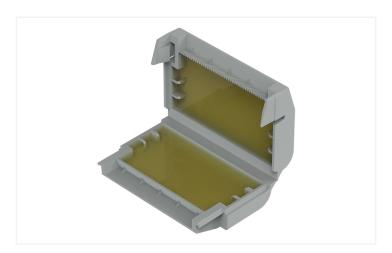



https://www.wago.com/207-1333



Application Examples

- · Bathroom installation
- · Washing facilities/irrigation systems
- Parking lot lighting
- Farms and garden centers
- Swimming pool areas
- Charging stations and lighting systems in ports

• Note on Packaging Unit (PU) and Subpackaging Unit (SPU):

- If you order a full PU, you will receive our eco-friendly, sustainable cardboard blisters packed in a shelf-ready box.
- If you order a quantity smaller than a full PU, you will receive the eco-friendly, sustainable cardboard blisters without a shelf-ready box.
- Please refer to the system description for the splicing connectors that can be used.
- Your benefits:
- Easy, fast and safe to use
- · Can be used immediately and accessed again later
- Silicon-free
- · Label-free
- · Suitable for indefinite storage
- · The complete system consisting of WAGO's gelboxes and splicing connectors has been VDE-tested and IPX8-certified.

Connection data

| Connection 1 | |
|----------------|----------------|
| Actuation type | Locking system |

| Physical data | | |
|---------------|------------------------|--|
| Width | 52.7 mm / 2.075 inches | |
| Height | 17.8 mm / 0.701 inches | |
| Depth | 33.6 mm / 1.323 inches | |

| Mechanical data | |
|-----------------|---|
| Design | Size 3 |
| Mounting type | Flying leads |
| Suitable | for 4 mm ² splicing connectors |

| Material data | |
|----------------------|--|
| Note (material data) | Information on material specifications can be found here |
| Color | gray |
| Housing material | Polypropylene |
| Fire load | 0 MJ |
| Weight | 21 g |

| Environmental requirements | |
|---------------------------------|-----------|
| Ambient temperature (operation) | -55 +85 ℃ |
| Ambient temperature (storage) | 0+40°C |

https://www.wago.com/207-1333



| Commercial data | |
|-----------------------|---------------|
| ETIM 8.0 | EC001170 |
| ETIM 7.0 | EC001170 |
| PU (SPU) | 36 (3) pcs |
| Country of origin | DE |
| GTIN | 4055143997805 |
| Customs tariff number | 85389099990 |

Environmental Product Compliance

RoHS Compliance Status Compliant,No Exemption

Approvals / Certificates

General approvals



| Approval | Standard | Certificate Name |
|---|----------|------------------|
| VDE VDE Prüf- und Zertifizie- rungsinstitut | EN 60998 | 400051938 |

Declarations of conformity and manufacturer's declarations

| Approval | Standard | Certificate Name |
|---|----------|------------------|
| EU-Declaration of Conformity WAGO GmbH & Co. KG | - | - |
| UK-Declaration of Confor- mity WAGO GmbH & Co. KG | - | - |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 207-1333



| Documentation | | |
|--|-------------------|--------------------------|
| System Description | | |
| System Description 207 Series Gel boxes | pdf 1156.45 KB | <u>↓</u> |
| System Description 207 Series Gel boxes | pdf 1191.37 KB | $\underline{\downarrow}$ |

| Additional Information | | |
|------------------------|-------------------|-------------------------|
| Certificate | pdf 2308.76 KB | $\overline{\downarrow}$ |
| DLG Test Report 7438 | pdf 1455.46 KB | $\overline{\downarrow}$ |

| Bid Text | | |
|----------|------------------|--------------------------|
| 207-1333 | xml 3.57 KB | $\underline{\downarrow}$ |
| 207-1333 | docx 20.39 KB | \downarrow |

https://www.wago.com/207-1333



CAD/CAE-Data

CAD data

2D/3D Models 207-1333



CAE data

ZUKEN Portal 207-1333



Installation Notes

Installation



Open the Gelbox at the side latches.



Place the wired connector in the Gelbox.



Place the wired connector in the Gelbox.



Close the Gelbox.



Close latch securely.



- Open the Gelbox.
- Rewire with new components.



Re-accessible:

- Remove the gel.



Lift the flap and pull the cover perforation forward.



Press in the perforation on the sides.



Tear off the cover from the perforation.



As a counter display: Bend the rear flap at the fold, straighten it and fix it in the cardboard cut-out



If the flap is not required, tear off from the perforation.

Subject to changes. Please also observe the further product documentation!