

EVN 15



Short description

Axial window fan for air extraction, plastic impeller

Application examples

Restaurant, Showroom, Building container, Lecture room, Nursery school

Article number 0080.0853

Technical data

Air flow volume	240 m ³ /h
Rotating speed	1.550 1/min
Air direction	Air extraction
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	25 W
I _{max}	0,15 A
Degree of protection	IP 24
Mains cable	3 / 1,5 mm ²
Installation site	Window / Wall
Type of installation	Surface-mounted
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	1,6 kg
Type of shutter	Airstream-operated opening/closing
Nominal size	150 mm
Airstream temperature at I _{Max}	40 °C
Sound pressure level	41 dB(A)
Range	C
EAN	4012799808534


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L _{WA7, high} (dB(A))	–	–	–	–	–	–	–	–	48


EVN 15

L_{WA7} = housing and free inlet sound power level in dB.

Characteristic curve

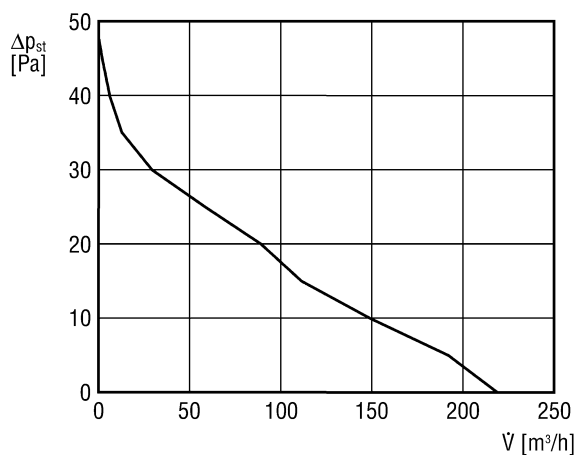

Dimensioned drawing [mm]

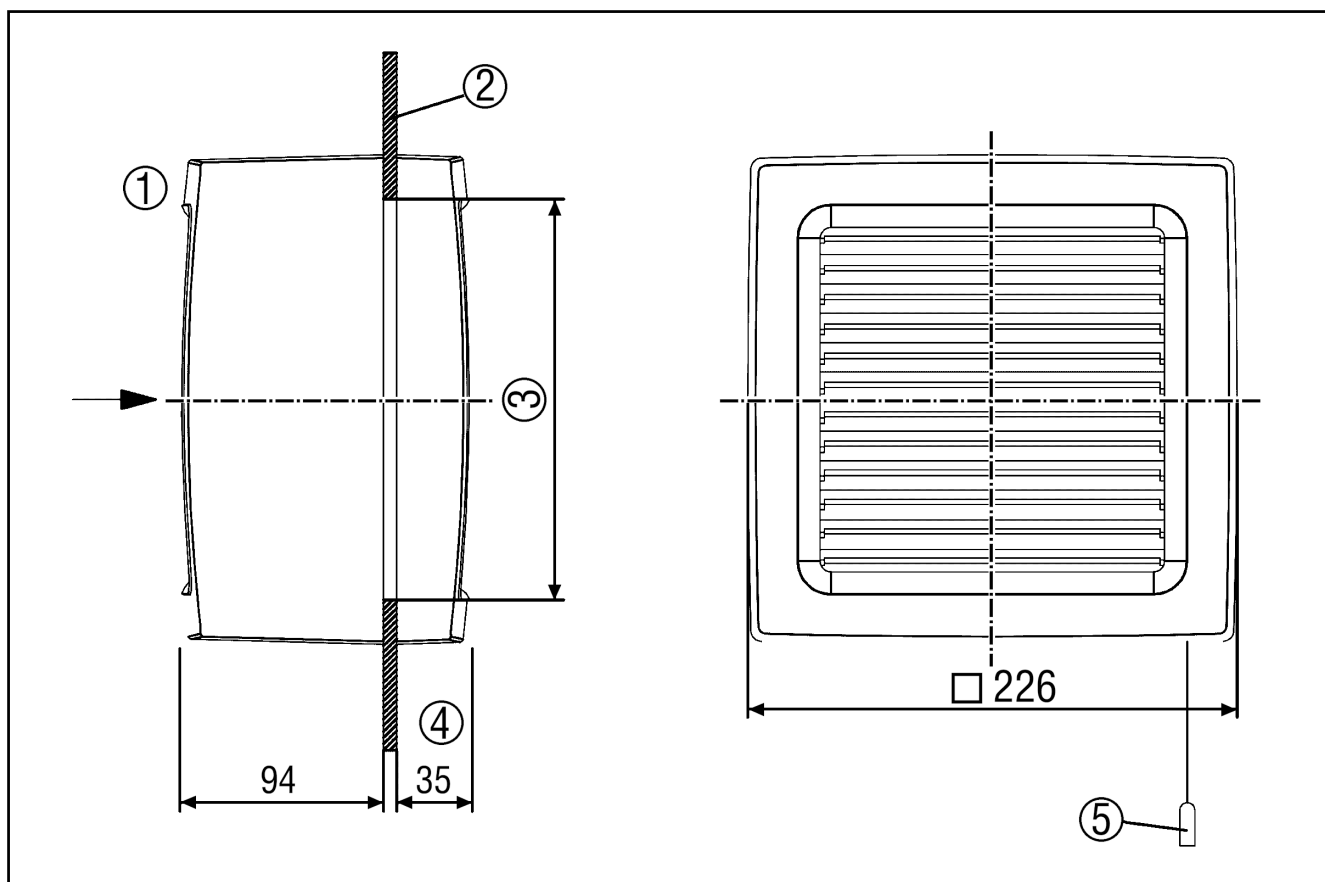

① Inside



EVN 15

- ② Window
- ③ Window cut-out: Minimum diameter is 184 mm, maximum diameter is 195 mm
- ④ 15 mm more with open lamella
- ⑤ Pull-cord only for EVN 15 P