


DIGITUS® Junction Boxes for Twisted Pair Cables

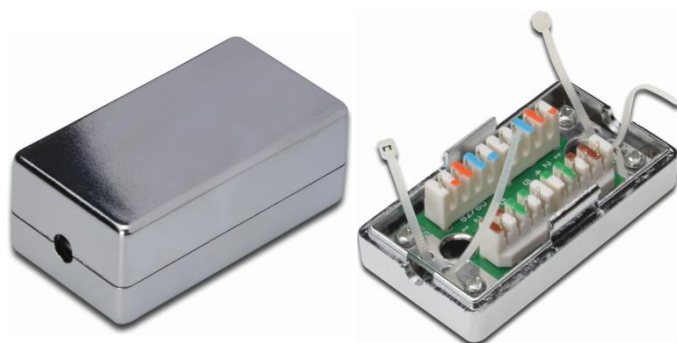

✓ Junction Box for Twisted Pair

✓ Available as CAT 6 & CAT 5e version

✓ Shielded

✓ LSA EIA/TIA 568 A&B

Abstract

DIGITUS® Junction Boxes for Twisted Pair Cables, CAT 5e and CAT 6

Features

- Material enclosure: ABS non halogen, UL 94 V0
- Connection over LSA strips
- Integrated strain relief
- Shielded
- LSA EIA/TIA 568 A & B
- Cable entry: Up to 6.8 mm
- Diameter Cu-Conductor: AWG (26/1 ... 22/1)
- Temperature range: -40°C up to +80 °C
- Current carrying capacity: 1A at 50 °C
- Material IDC Terminal: Phosphor bronze with 50 µ tin plated over 60 µ nickel plated
- Material PCB: FR4, 1.2 mm thickness
- Workable with 110- and KRONE LSA punch down tools
- Available as CAT 6 and CAT 5e version

Product Overview

The DIGITUS® Connection module is for the purpose of connecting or extension of Twisted Pair Cables.

Product Number Information

AT-ALSA6-M	DIGITUS® Junction Box for Twisted Pair Cables, LSA, shielded, CAT 6
DN-93902	DIGITUS® Junction Box for Twisted Pair Cables, LSA, shielded, CAT 5e

More Junction Boxes for Twisted Pair Cables from DIGITUS®

DN-93907-1	DIGITUS® Junction Box CAT 7, 600 MHz, LSA strips for AWG 22-26, shielded, compact design, 26x35x80 mm
------------	---

Technical Drawings

