


Datasheet

Art.No. 92.030.5958.1

Intermediate coupling GST18i3Z 1P1 SW

Intermediate coupling, GST18i3, 3 pole, 1 input, 1 output, 250 V, 20 A, for direct routing, colour of coding: black

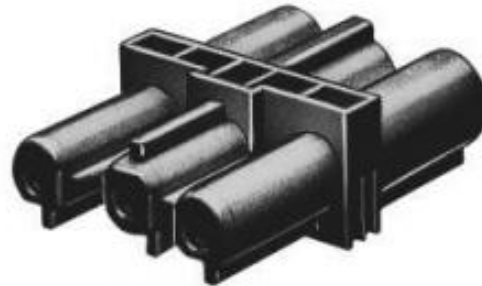

Art.No.	92.030.5958.1
EAN	4015573236820
Order unit	1 pieces

Approvals



Technical data

General

Rated current	20 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Mechanical coding	Code 1
Interlockable	No
Color of coding/ contact carrier	Black
Marking of poles	L, N, PE

Model

Number of poles	3
Number of inputs	1
Number of outputs	1
Type of fastening	No
Degree of protection (IP)	IP20
Type of distributor	Intermediate coupling

Material

Housing material	Polyamide
Halogen free	Yes
Contact material	CuZn
Insulation components continuous temperature	100 °C
Surface finish	Tin-plated

Dimensions

Length	39 mm
Width	28.2 mm
Height	13 mm

Accessories

Art.No.:	Type:	Description
05.561.3653.0	Cover cap GST18i3VS B WS	Cover piece for female GST18i3, white
05.561.3653.1	Cover cap GST18i3VS B SW	Cover piece for female GST18i3, black
05.564.5353.0	Cover cap GST18i3/4/5 SW	Cover piece 12 pole black for female parts GST18i3-6
05.564.5353.2	Cover cap GST18i3/4/5 WS	Cover piece 12 pole white for female parts GST18i3-6
05.588.5753.0	Locking slide GST18 WS	Locking device for distributor GST18i3-5, retrofit part, white
05.588.5753.1	Locking slide GST18 SW	Locking device for distributor GST18i3-5, retrofit part, black
05.594.4250.0	Cover cap ST18/3B + GST18i3 ST WS	
05.594.4253.0	Cover cap ST18/3B + GST18i3 ST WS	

Drawings

