


Data sheet | Item number: 790-145

Carrier rail; with special perforations; 1000 mm long; tin-plated; silver-colored

www.wago.com/790-145

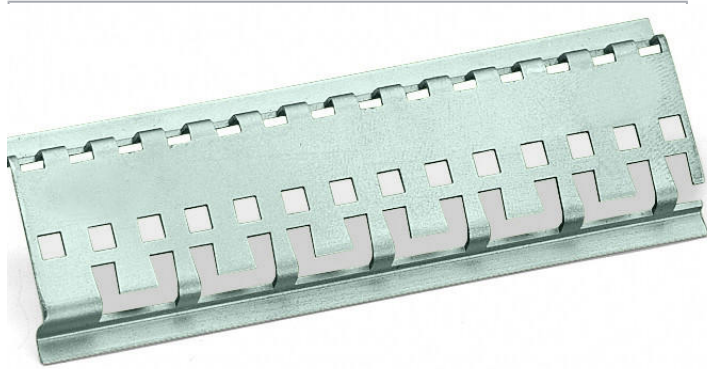

RoHS
Compliant



Color:

Data

Technical Data

Main product function

Shield termination

Physical data

Width

1000 mm / 39.37 inch

Material Data

Color

silver-colored

Weight

256 g

Commercial data

Packaging type

BOX

Country of origin

IT

GTIN

4045454701109

Customs tariff number

72169180000

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Compatible products

shield connection



Item no.: 790-144

Stand off; for carrier rail; suitable for M5 size screw; with special perforations

www.wago.com/790-144

Downloads

Documentation

Bid Text

790-145	19-Feb-2019	xml	Download
X81 - Datei		2.6 kB	

790-145	31-Aug-2017	doc	Download
doc - Datei		23.6 kB	

CAD/CAE-Data

CAD data

2D/3D Models 790-145	URL	Download
----------------------	-----	----------

CAE data

WSCAD Universe 790-145	URL	Download
------------------------	-----	----------


ZUKEN Portal 790-145	URL	Download
----------------------	-----	----------

Installation Notes


Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

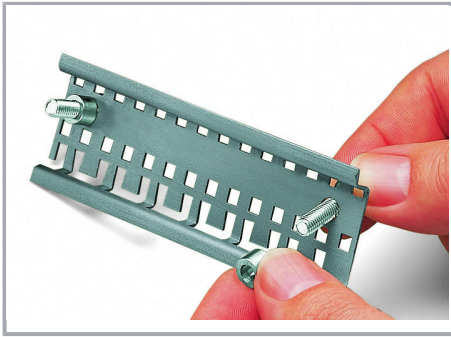


Fitting a spacer sleeve to a specialty slotted carrier rail.

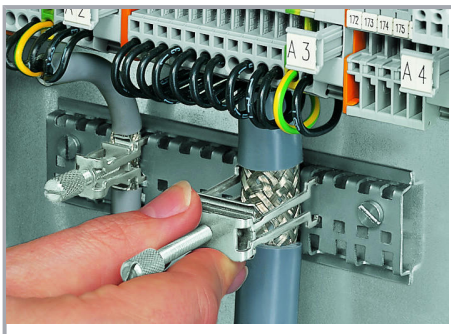

Fitting an additional clamping saddle.

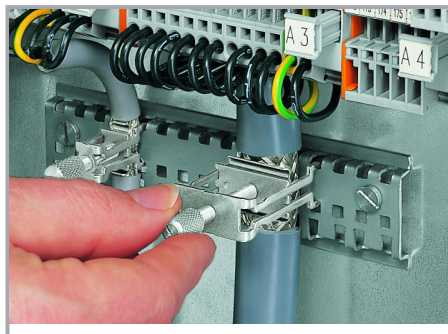


Tightening/removing a shield clamping saddle.

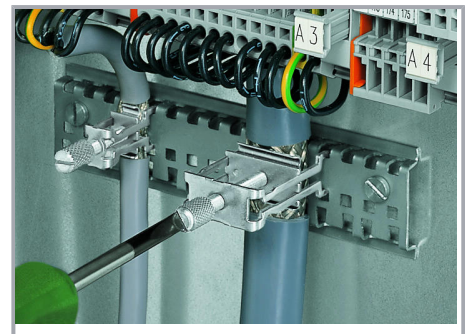

After connection, tighten the knurled screw to complete the installation.

Recommended tightening torque: 0.5 Nm

Subject to changes. Please also observe the further product documentation!

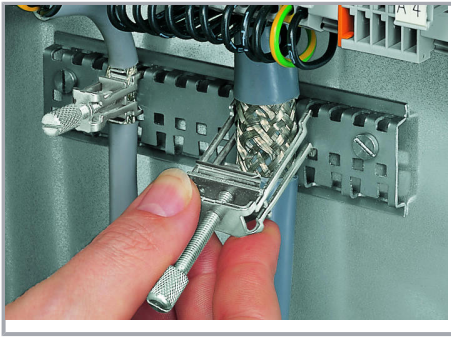

To remove the clamping saddle, unscrew until ratcheted mechanism is released, then slightly tip saddle and remove the clamping saddle.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.