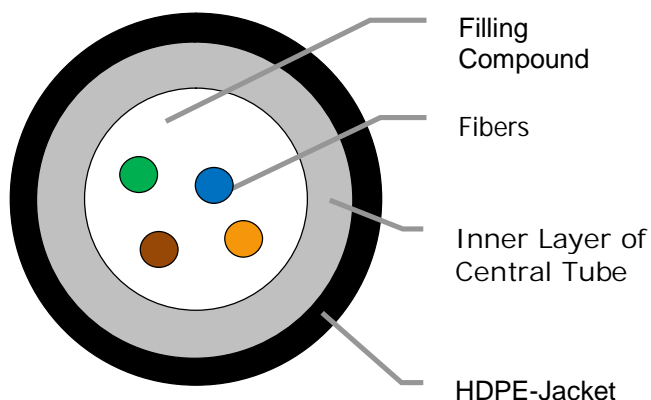


Data sheet

MiniXtend Drop Cable

**Fully Dielectric Mini Duct Cable with
4 Corning[®] single-mode fibers E9/125 SMF-28[®]ULTRA
with low-loss and improved bend performance technologies**

**Features & Benefits**

Dual layer central tube design and the HDPE sheath provides

- Optimized cable stiffness and low friction sheath material for excellent installation performance
- Good mechanical and environmental properties
- Fully dielectric duct cable requires no grounding

Principle drawing

A-D2Y 1x4 E9U/125 0,34F3,5 + 0,20H18

| Cable Type | Fibres | Diameter (mm) | Weight (kg/km) | Bending Radius (mm) |
|--------------------------------------|--------|---------------|----------------|---------------------|
| A-D2Y 1x4 E9U/125 0,34F3,5 + 0,20H18 | 2 | 2,0 | 3,5 | 17 |

Data sheet

MiniXtend Drop Cable**Colour coding**

Fibers: blue, orange, green, brown
 Jacket: black

Cable printing: Meter + hand set + sinus + CORNING + year +
 A-D(ZN)2Y 4 E9U/125

Method: Laser

Characteristics of fibers SMF-28[®] ULTRA (low loss and bend improved fiber)

Optical and mechanical:

| | | |
|--|--------------|-------------|
| Mode field diameter at 1310 nm | [μm] | 9.2 ± 0.4 |
| Cladding diameter | [μm] | 125.0 ± 0.7 |
| Coating diameter | [μm] | 242 ± 5 |
| Attenuation at 1310 nm | [dB/km] | ≤ 0.34 |
| Attenuation at 1550 nm | [dB/km] | ≤ 0.20 |
| Attenuation at 1383 nm | [dB/km] | ≤ 0.34 |
| Dispersion in the range 1285 to 1330 nm | [ps/(nm*km)] | ≤ 3.5 |
| Max.Dispersion at 1550 nm | [ps/(nm*km)] | ≤ 18 |
| Cable cutoff Wavelength (λ_{cc}) | [nm] | ≤ 1260 |
| PMD cabled (link value) | Ps/√ | ≤ 0,04* |
| Max.PMD cabled (single fiber) | Ps/√ | ≤ 0,1 |

*) Complies with IEC 60794-3:2001, Section 5.5, Method 1 (m=20, Q=0,01%)

The fibers is fully compliant with ITU-T G.652.D standard and exceeds ITU-T G.657.A1 standard

Characteristics of cable

Mechanical and environmental:

| | | |
|---|-----------|-----------|
| Tensile strength during installation | [N] | 40 |
| Impact resistance (3 impacts, 300mm hammer radius, attenuation increase reversible) | [Nm] | 1 |
| Crush resistance | [N/10 cm] | 850 |
| Operation temperature range for E9/XB/125 bend optimized fibers | [°C] | -30...+70 |
| Operation temperature range for SMF 28e+ - fibers | [°C] | -20...+70 |
| Installation temperature range | [°C] | -5 ...+50 |
| Water penetration (0.1 bar, 24 h) | m | ≤ 1 |

Delivery:

Delivery length up to 2 km