


DATA SHEET

CABLE LUBRICANT GEL

GEL 250 g / 1000 g

Item no.: 30467 / 30064

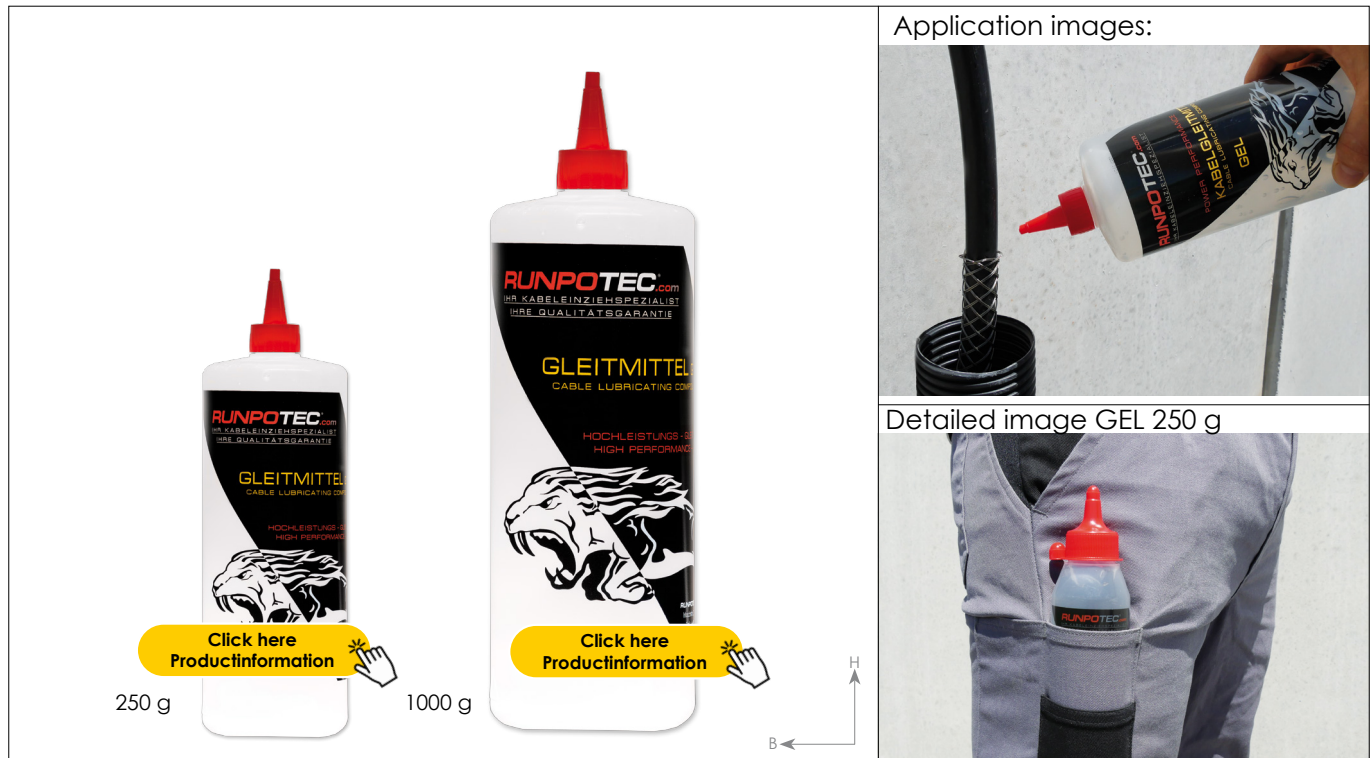

DATA

ITEM NO.	30467	30064
CONTENT	250 g	1000 g
WEIGHT	0,263 kg	1,1 kg
DIMENSION 250 G	Height 19,5 cm / Width 5,5 cm	
DIMENSION 1000 G	Height 26,5 cm / Width 8,5 cm	
Carton order	24 pieces	8 pieces
EAN-CODE	9120045474862	9120045472318

DESCRIPTION

Operational area:

RUNPOTEC cable lubricant GEL reduces the frictional resistance enormously, thus making it easier to pull cables and wires into electrical installation pipes and protecting them from cable damage.

Application:

Apply RUNPOTEC cable lubricant GEL to the cable or on the inside of the pipe. Also highly effective for the pushing in with cable pushing systems. To prevent staining, we recommend covering sensitive surfaces or removing excess lubricant directly with a damp cloth.

Product features:

Non-flammable, reduces frictional resistance, temperature resistant up to 85 °C, improved sliding effect, silicone-free, water-soluble, non-corrosive, no sticking, skin-friendly, biodegradable. Dissolves without residue.

Caution: Seal after use, store in a cool and dry place.

Contact with live parts must be avoided

Risk of short circuit! EUH208: Contains 2-methyl-2H-isothiazole-3-one.

Can cause allergic reactions. Staining possible on sensitive surfaces.

For instructions see safety data sheet!

Scope of delivery: 1 piece cable lubricant gel

Application images:



Detailed image GEL 250 g



ADVANTAGES

- **Not flammable!**
- **No sticking, colourless and odourless**
Dissolves without residue
- **Great price/performance ratio**
- **Excellent sliding and lubricating effect**

INFORMATION

More cable lubricating compound:

Spray

Item no.: 20523



FOAM

Item no.: 20522

