


MINI PLAY

71-3816-14-M2



The photograph may not match the reference exactly. Please read the product description to identify the finish.

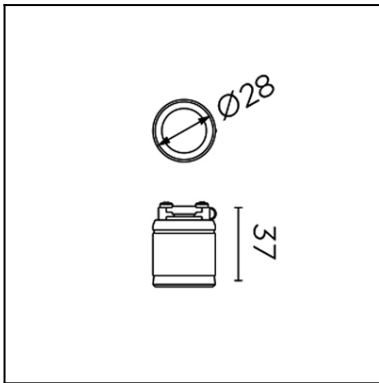

Description


LED module with frame needed, which is not included. Download -Accessories- file to see available frames.

TECHNICAL CHARACTERISTICS

Type:	DOWNLIGHT RECESSED
IP Protection degrees:	IP20
Light source 1:	1 x LED Cree 3,2 Warm White - 2700K 287 lm ^(N) CRI 80
Angle of the optics / Reflector:	24°
Voltage / Frequency:	max. 350mA
Warranty (Years):	3
Option to extend the guarantee (Years):	5
Units per box:	50
Net Weight (Kg):	0.035
EAN:	8435381419547



LED 2700K 40° 3,2W



MATERIALS / FINISHES


Structure material: Aluminium
Aluminium

Structure finish: White
Anodized

Diffuser material: UVA methacrylate

Diffuser finish: Transparent

Download photometric file .ldt / .ies

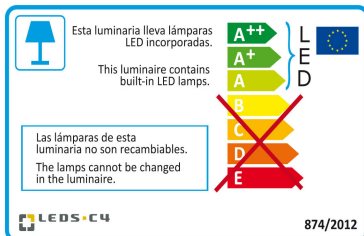

Click on image to download energy label

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.


Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

LED S-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.

Please consult the sales team to clarify any doubt.

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

71-3818-00-00

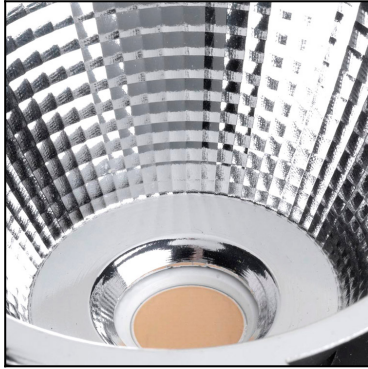

Reflector (40°)

Structure material: Aluminium
Structure finish: Anodized




71-3819-14-00




Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: White




IP54

71-3819-AF-00

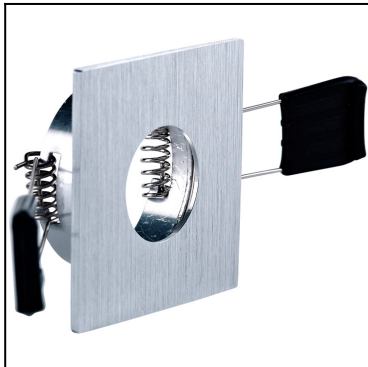

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: Satin




IP54

71-3820-14-00



Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: White




IP54

71-3820-AF-00

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: Satin




IP54

71-3821-14-00

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: White




IP54

71-3821-AF-00

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: Satin




IP54

71-3822-14-00

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: White




IP54

71-3822-AF-00

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: Satin




IP54

71-3823-14-00

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: White




IP23

71-3823-AF-00

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: Satin




IP23

71-3824-14-00

Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material: Aluminium
Structure finish: White



IP23

71-3824-AF-00




Frame compatible with LED module from the MINI PLAY series. Download -Accessories- file to see available modules.

Structure material:

Aluminium

Structure finish:

Satin




IP23

Luminaire			Measurem.			Lamp		
Code	71-3816-14-M2		Code	71-3816-14-M2		Code	LED	
Name	71-3816-14-M2 38D 2700K		Name	71-3816-14-M2 38D 2700K		Number	1	
Line	Eulumdat		Date	12-11-2014		Position		
Efficiency			76.66%		Coordinate system	CG	Total Flux	359.00 lm
Maximum value			574.13 cd		Position	C=330.00 G=6.00	Asymmetrical	
Rectangular Luminaire			Length	20 mm	Width	20 mm	Height	1 mm
Rectangular Luminous Area			Length	20 mm	Width	20 mm	Height	0 mm
Horizontal Luminous Area			0.000400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°			0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°			0.000000 m2		Glare area at 76°		0.000097 m2	
Symmetry Type			Asymmetrical		Maximum Gamma Angle		90	
Measurement Distance			0.00		Measurement Flux		359.00 lm	
Operator					Source voltage			
Temperature			25.00 °C		Source current			
Humidity			60.00 %		Photocell			
Notes								

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumat	LED	LED - 3.30 W	359.00	3.30	1
C.I.E.	93 96 99 100 77	D DIN 5040		A60	
F UTE	0.77 A	B NBN		BZ 1	


20mm x 20mm






C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 76.66 %
RN 0.00 %

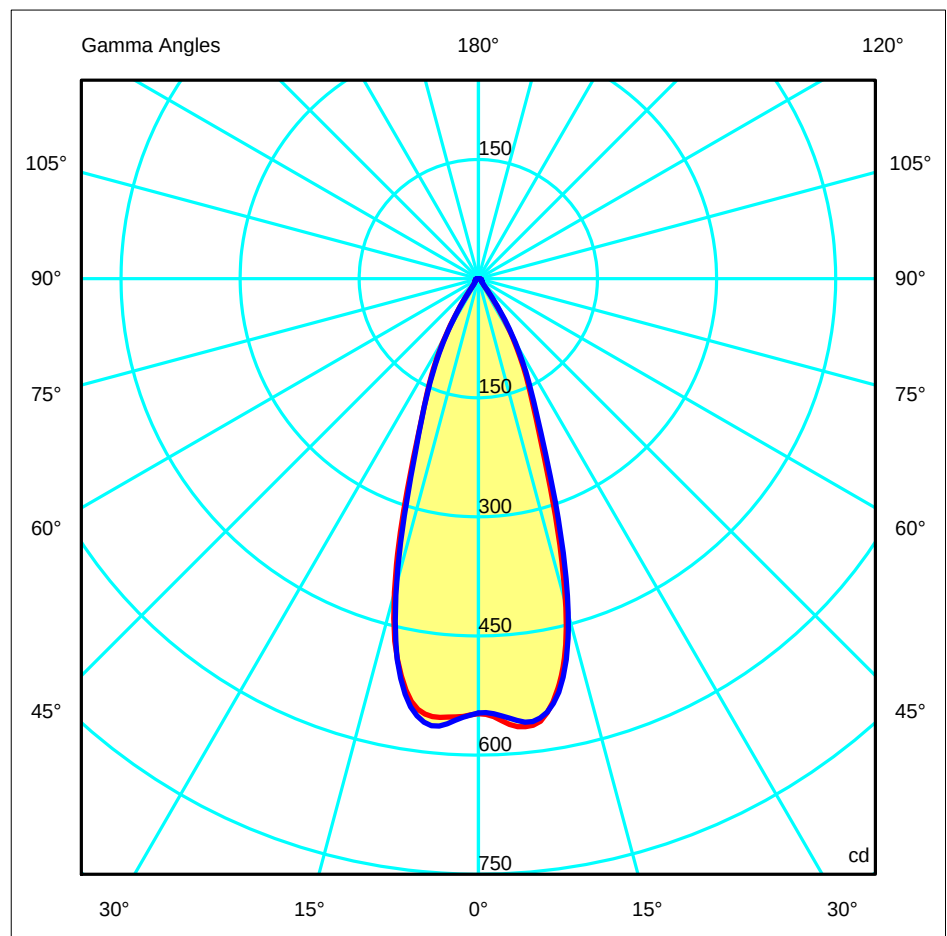


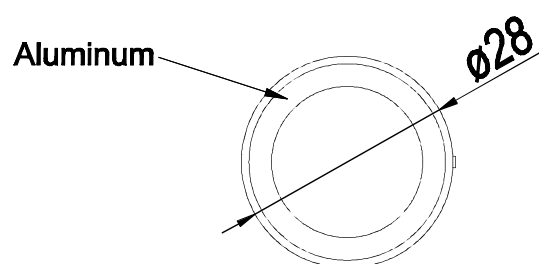

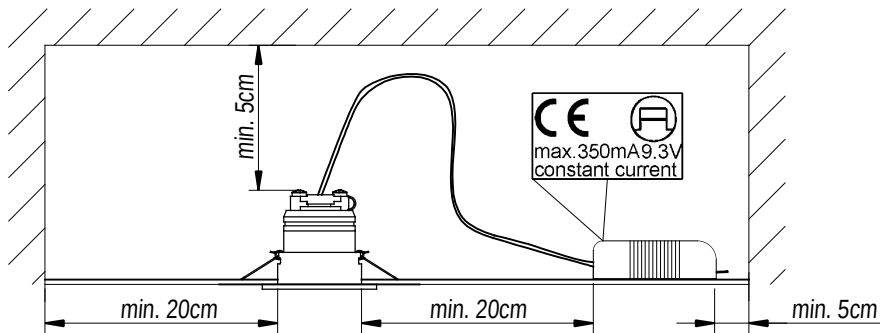


IP20


1

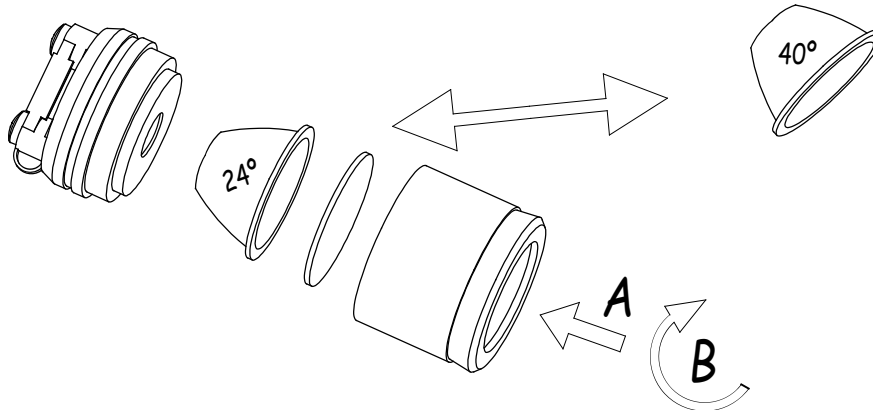

2

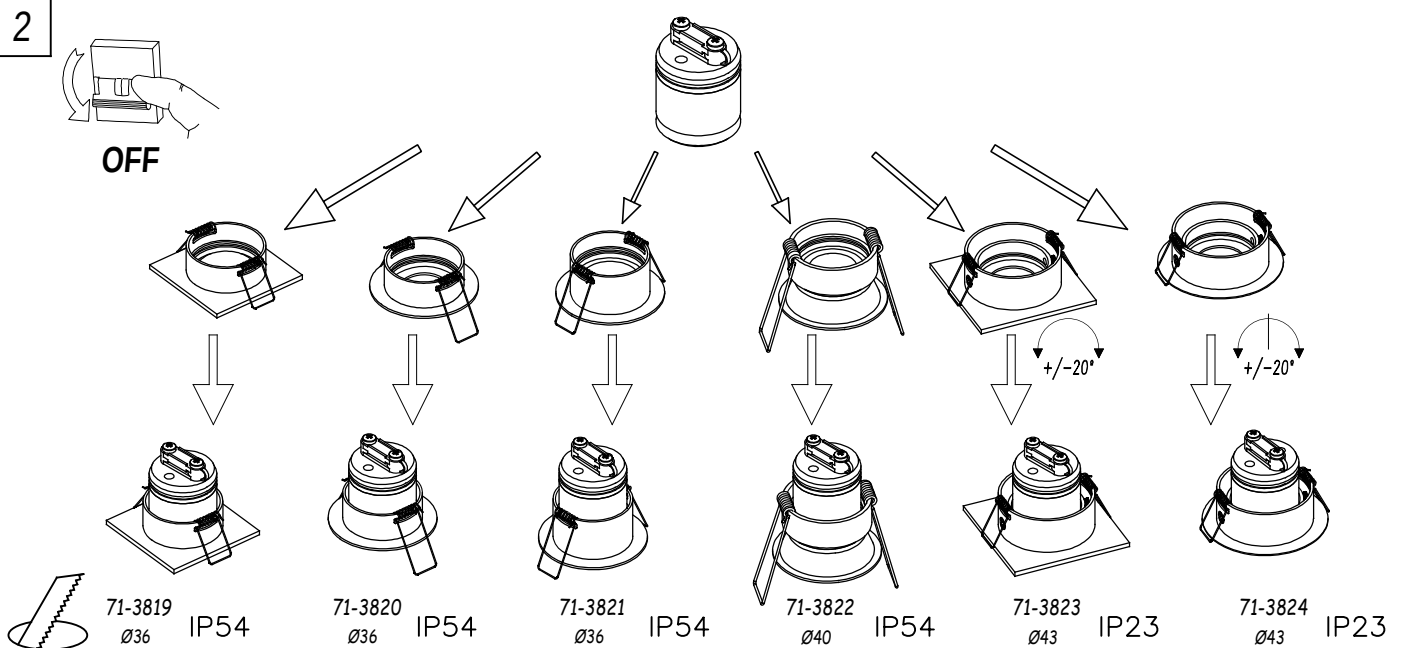

3

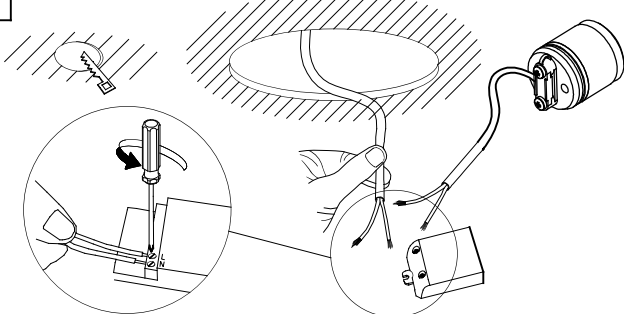

4

