

## Beacon Muse - 3000K on-board dimming - 26W

Beacon Muse 26W WW DIM L1 WHT

2052861



### Range features

- Upgraded LED chip for improved light output
- High Output high efficiency LED spotlight range
- Adjustable optics provides wide flood 65 degrees which can be adjusted to 10 degree spot without the need for additional lenses of reflectors
- Fully adjustable spotlight using cutting edge cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV free light source without heat radiation
- 30 deg Beam Angle with internal reflector
- Beacon Accent offers very high CRI 97 ideal for museums, galleries and applications where the installation requires flexible lighting solutions
- Extremely high saturation on R9 red saturation at 90



### PRODUCT OVERVIEW

|                    |                         |
|--------------------|-------------------------|
| Ordering number    | 2052861                 |
| Technology         | LED                     |
| Dimmable           | Yes                     |
| EAN code           | 5025768528615           |
| Certifications     | F-mark                  |
| Mount              | Single circuit track    |
| Housing            | Die-cast aluminium      |
| CRI (Ra)           | 97                      |
| Beam angle(°)      | 10° Wide flood 65°      |
| Luminous flux (lm) | 390-837                 |
| Voltage (V)        | 230                     |
| Lamps              | 26W Citizen CILED 3000K |
| Colour             | White                   |
| Included lamp      | Integrated LED          |
| IP rating          | 20                      |

## Beacon Muse - 3000K on-board dimming - 26W

Beacon Muse 26W WW DIM L1 WHT

2052861

### DATA TABLE

#### General data

|                       |  |
|-----------------------|--|
| Ordering number       | 2052861  |
| Technology            | LED  |
| Dimmable              | Yes  |
| EAN code              | 5025768528615  |
| E-number FI           | 4274541  |
| Certifications        | F-mark   |
| Mount                 | Single circuit track   |
| Notes                 | Adjustable optics provides wide flood 65° which can be adjusted to 10° spot without the need for additional lenses or reflectors   |
| Range features        | Upgraded LED chip for improved light output. High Output high efficiency LED spotlight range. Adjustable optics provides wide flood 65 degrees which can be adjusted to 10 degree spot without the need for additional lenses or reflectors. Fully adjustable spotlight using cutting edge cooling fin design to maximise thermal management and reduction of LED junction temperature. IR/UV free light source without heat radiation. 30 deg Beam Angle with internal reflector. Beacon Accent offers very high CRI 97 ideal for museums, galleries and applications where the installation requires flexible lighting solutions. Extremely high saturation on R9 red saturation at 90 |
| Product name          | Beacon Muse 26W WW DIM L1 WHT  |
| Environment           | Interior   |
| General application   | Museum & Gallery   |
| Housing               | Die-cast aluminium   |
| National safety marks | ENEC   |
| Specific application  | Museum & Gallery, Shop window, Track lighting  |
| Sales pack quantity   | 1  |

#### Optical data

|                    |                    |
|--------------------|--------------------|
| CRI (Ra)           | 97                 |
| Beam angle(°)      | 10° Wide flood 65° |
| Luminous flux (lm) | 390-837            |
| Distribution type  | Adjustable         |

#### Electrical data

|                             |                         |
|-----------------------------|-------------------------|
| Total power consumption (W) | 26                      |
| Voltage (V)                 | 230                     |
| Electrical protection       | Class I                 |
| Lamps                       | 26W Citizen CILED 3000K |
| Leading trailing edge       | No                      |
| Number of heads             | 1                       |
| Transformer availability    | Included                |
| Transformer mounting        | Integral                |
| Total number of lamps       | 1                       |

## Beacon Muse - 3000K on-board dimming - 26W

*Beacon Muse 26W WW DIM L1 WHT*

**2052861**

### Physical data


|   |                       |
|---|-----------------------|
| <b>Weight (kg)</b>                                | 1.32                  |
| <b>Colour</b>                                     | White                 |
| <b>Lamp included</b>                              | Yes                   |
| <b>Included lamp</b>                              | Integrated LED        |
| <b>Height (mm)</b>                                | 141                   |
| <b>IP rating</b>                                  | 20                    |
| <b>Vertical tilt (°)</b>                          | 90°                   |
| <b>Horizontal rotation (°)</b>                    | 355°                  |
| <b>Diameter (mm)</b>                              | 79                    |
| <b>Safety distance</b>                            | 0.8                   |
| <b>Track adaptor type</b>                         | Single circuit track  |
| <b>Single package dimensions (L x W x H) (cm)</b> | 17.50 x 15.00 x 17.50 |
| <b>Outer package dimensions (L x W x H) (cm)</b>  | 17.50 x 15.00 x 17.50 |

## Beacon Muse - 3000K on-board dimming - 26W


*Beacon Muse 26W WW DIM L1 WHT*

**2052861**

### PHOTOMETRY

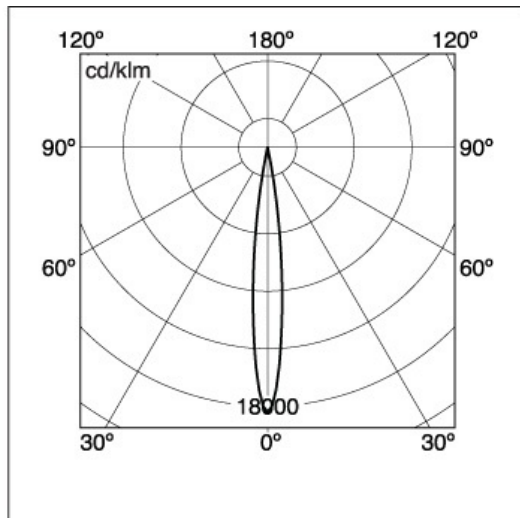

3000K

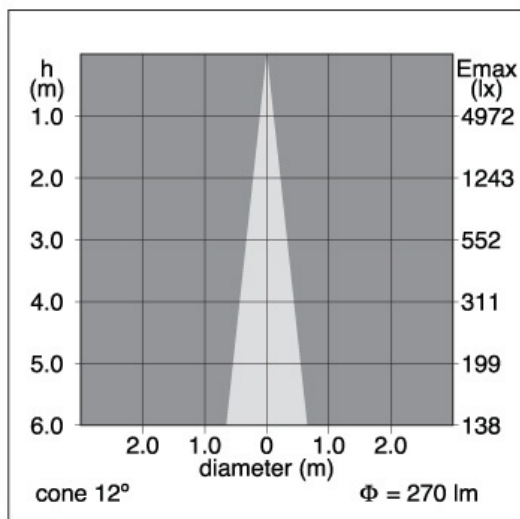


3000K

## Beacon Muse - 3000K on-board dimming - 26W

*Beacon Muse 26W WW DIM L1 WHT*

**2052861**

### TECHNICAL DRAWINGS



### ENERGY LABEL

