

GLOBAL Trac Base

L1/16 A/230 V. IP20.

GLOBAL Trac Base tracks

Available colours: -1 grey (AW202JR), -2 black (RAL 9005), -3 white (RAL 9010).

GB
2100-2300



GBF
2100-2300




Type	EAN code	Dimensions in mm/ track length	Surface treatment/colour/ material	PCS/ Package
GB 2100-1	64100 14 509 01-9	1000	Grey	8/480
GB 2100-2	64100 14 508 01-2	1000	Black	8/480
GB 2100-3	64100 14 509 06-4	1000	White	8/480
GB 2200-1	64100 14 509 02-6	2000	Grey	8/480
GB 2200-2	64100 14 508 02-9	2000	Black	8/480
GB 2200-3	64100 14 509 07-1	2000	White	8/480
GB 2300-1	64100 14 509 03-3	3000	Grey	8/480
GB 2300-2	64100 14 508 03-6	3000	Black	8/480
GB 2300-3	64100 14 509 08-8	3000	White	8/480
GBF 2100-1	64100 14 509 86-6	1000	Grey	6/180
GBF 2100-2	64100 14 508 91-3	1000	Black	6/180
GBF 2100-3	64100 14 509 91-0	1000	White	6/180
GBF 2200-1	64100 14 509 87-3	2000	Grey	6/180
GBF 2200-2	64100 14 508 92-0	2000	Black	6/180
GBF 2200-3	64100 14 509 92-7	2000	White	6/180
GBF 2300-1	64100 14 509 88-0	3000	Grey	6/180
GBF 2300-2	64100 14 508 93-7	3000	Black	6/180
GBF 2300-3	64100 14 509 93-4	3000	White	6/180

GLOBAL Track Base accessories

Power supply option in all connectors except GB 21 ja GB 24. All materials used are halogen free and VO-self-extinguishing. Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).



End feed
GB 11




GB 12




Type	EAN code	Polarity groove	Surface treatment/colour/ material	PCS/ Package
GB 11-1	64100 14 509 15-6		Grey	10/100
GB 11-2	64100 14 508 11-1		Black	10/100
GB 11-3	64100 14 509 11-8		White	10/100
GB 12-1	64100 14 509 16-3		Grey	10/100
GB 12-2	64100 14 508 12-8		Black	10/100
GB 12-3	64100 14 509 12-5		White	10/100

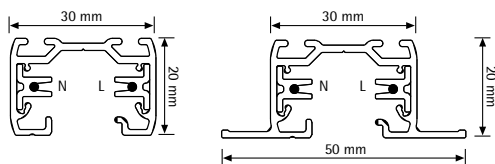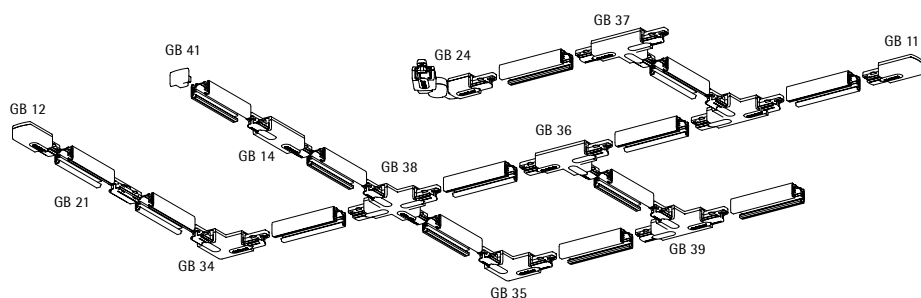

The recommended fastening distance is 1000 mm.
NOTE: A load not heavier than 10 kg may hang on a power takeoff adapter, the pull strength being 100 N (1kp = 9.81N) and the maximum torque 2.5 Nm. (GB 66 5 kg/50 N).





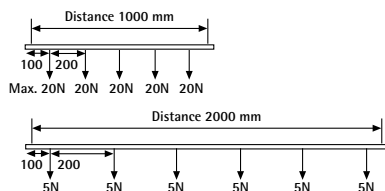


L/mm	a/mm	b/mm	c/mm	d/mm
1000	250			
2000	250	1000		
3000	250		1000	1000



GLOBAL Trac Base accessories

Power supply option in all connectors except GB 21 ja GB 24.
Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

Middle feed GB 14	Type	EAN code	Polarity groove	Surface treatment/colour/ material	PCS/ Package
	GB 14-1	64100 14 509 17-0		Grey	5/50
	GB 14-2	64100 14 508 14-2		Black	5/50
	GB 14-3	64100 14 509 14-9		White	5/50
Straight connector GB 21	GB 21-1	64100 14 509 18-7		Grey	10/100
	GB 21-2	64100 14 508 21-0		Black	10/100
	GB 21-3	64100 14 509 21-7		White	10/100
Adjustable corner connector GB 24	GB 24-1	64100 14 509 19-4		Grey	5/25
	GB 24-2	64100 14 508 24-1		Black	5/25
	GB 24-3	64100 14 509 24-8		White	5/25
L-feed GB 34, 35	GB 34-1	64100 14 509 25-5		Grey	5/25
	GB 34-2	64100 14 508 34-0		Black	5/25
	GB 34-3	64100 14 509 34-7		White	5/25
	GB 35-1	64100 14 509 26-2		Grey	5/25
	GB 35-2	64100 14 508 35-7		Black	5/25
	GB 35-3	64100 14 509 35-4		White	5/25
T-feed GB 36, 37, 39, 40	GB 36-1	64100 14 509 27-9		Grey	5/25
	GB 36-2	64100 14 508 36-4		Black	5/25
	GB 36-3	64100 14 509 36-1		White	5/25
	GB 37-1	64100 14 509 28-6		Grey	5/25
	GB 37-2	64100 14 508 37-1		Black	5/25
	GB 37-3	64100 14 509 37-8		White	5/25
	GB 39-1	64100 14 509 30-9		Grey	5/25
	GB 39-2	64100 14 508 39-5		Black	5/25
	GB 39-3	64100 14 509 39-2		White	5/25
	GB 40-1	64100 14 509 31-6		Grey	5/25
	GB 40-2	64100 14 508 40-1		Black	5/25
	GB 40-3	64100 14 509 40-8		White	5/25
X-feed GB 38	GB 38-1	64100 14 509 29-3		Grey	5/25
	GB 38-2	64100 14 508 38-8		Black	5/25
	GB 38-3	64100 14 509 38-5		White	5/25
End cap GB 41	GB 41-1	64100 14 509 32-3		Grey	10/100
	GB 41-2	64100 14 508 41-8		Black	10/100
	GB 41-3	64100 14 509 41-5		White	10/100

GLOBAL Trac Base other parts

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

Hook base GBA 14	Type	EAN code		Surface treatment/colour/ material	PCS/ Package
	GBA 14-1	64100 14 509 81-1	For 2 mm hook	Grey	50/250
	GBA 14-2	64100 14 508 80-7	For 2 mm hook	Black	50/250
	GBA 14-3	64100 14 509 80-4	For 2 mm hook	White	50/250
Hook XTAK 11	XTAK 11-1	64100 14 500 79-5	Hook 2 mm	Steel	100/5000
	GBF 10-2	64100 14 508 82-1	Cover plate for GB11-14	Black	1/100
	GBF 10-3	64100 14 509 82-8	Cover plate for GB11-14	White	1/100
Outlet cover plate GBF 10	GBF 30-2	64100 14 508 83-8	Cover plate for GB34-40	Black	1/100
	GBF 30-3	64100 14 509 83-5	Cover plate for GB34-40	White	1/100
	GBF 30				

Use of L- and T-accessories

Red line indicates ground polarity groove

