


SPIKE LIGHTS SPECIFICATION SHEET

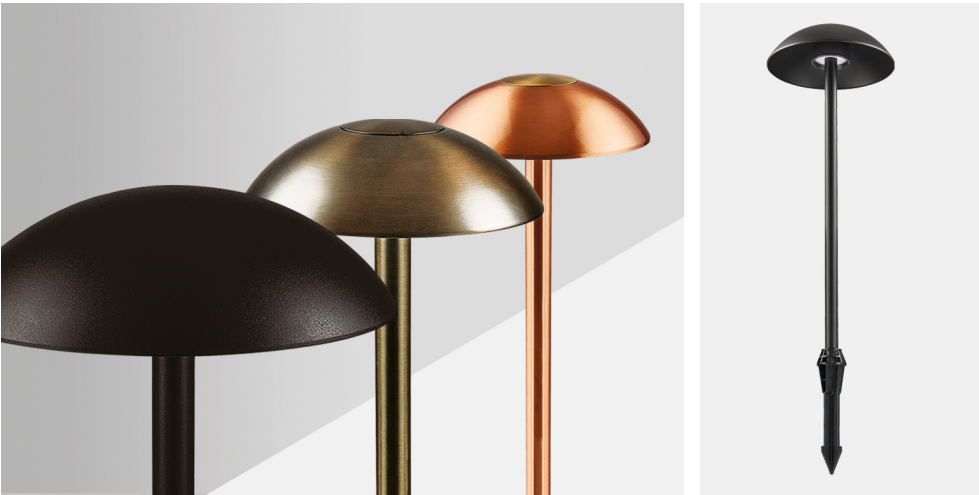

SL250

Low voltage, 24V, LED path light with spike

FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	N/A
Input	24V DC
LED Lifetime	50,000h L70 B10
CRI	>80Ra
SDCM	6SDCM

INSTALLATION INFORMATION

Construction Material	Brass, copper or powder coated aluminium
Weight	1390g
Maximum ambient temperature	35°C
Electric Class (1, 2, 3)	3

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
SL250ATX0X27	Brass, treated	4W	2700K	60-110°	200	50	152 / 68
SL250ATX0X30	Brass, treated	4W	3000K	60-110°	220	55	167 / 75
SL250ATX0X40	Brass, treated	4W	4000K	60-110°	240	60	182 / 82
SL250BPX0X27	Black powder coated aluminium	4W	2700K	60-110°	200	50	152 / 68
SL250BPX0X30	Black powder coated aluminium	4W	3000K	60-110°	220	55	167 / 75
SL250BPX0X40	Black powder coated aluminium	4W	4000K	60-110°	240	60	182 / 82
SL250CTX0X27	Copper, treated	4W	2700K	60-110°	200	50	152 / 68

WIRING INFORMATION

Cable / Flying Lead	1m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Parallel

LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PS1524	220V-240V	Yes	Yes (with PDCINT 1-10V)	-	1	3
PS3024B	220V-240V	Yes	Yes (with PDCINT 1-10V)	-	1	7
PS7524	220V-240V	Yes	Yes (with PDCINT 1-10V)	-	1	18

ACCESSORIES

JB1 / JB5 / JB6	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately
SL250A1	Surface mounted base plate	Sold Separately



01604 495 151
collingwoodlighting.com

- /collingwoodlighting
- /collingwoodlighting
- collingwoodled

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

- Low voltage product
- Robust cable for outdoor use
- Long lifetime of 50,000hrs
- 7 year warranty

Beam angle:

