

BOLLARDS SPECIFICATION SHEET



BOL LED

Straight to mains Iroko wood

FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	-
Inrush Current	17.9A 0.1ms
Construction Material	Iroko wood
Weight	5500g
Maximum ambient temperature	35°C
SELV	N/A (Integrated SELV driver)
Electric Class [1, 2, 3]	2

PHOTOMETRICS @ 25°C

Product code	Feature I	Feature II	Feature III	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
--------------	-----------	------------	-------------	---------	--------	------------	----	------	---------

BL03FIS30	Triple LED	Chamfered	Side cable entry	5W	3000K	110°	160	32	80
-----------	------------	-----------	------------------	----	-------	------	-----	----	----

WIRING INFORMATION

Cable / Flying Lead	NEW 1.5mm SY 2 Core PVC Steel Braid Cable
Type of Wiring Required	Parallel

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	N/A	N/A	N/A	N/A	N/A	N/A

ACCESSORIES

BOL LED BRACKET
JB5



COLLINGWOOD  
LIGHTING

01604 495 151  
collingwoodlighting.com

- /collingwoodlighting
- /collingwoodlighting
- collingwoodled

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

Choice of wood finishes: Iroko, Sapele or Oak

Pointed, Chamfered or Domed top


Choice of low-voltage or straight-to-mains

Side-entry cable or base-entry cable options


Three colour temperature options: 2700K, 3000K or 4000K

7 year warranty

Beam angle:

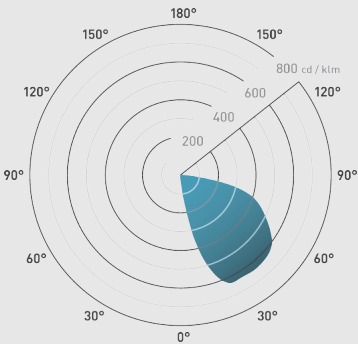

Recessed mount



Surface mount

