
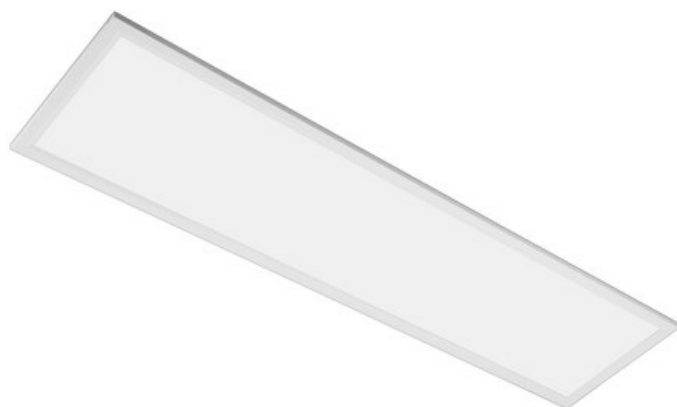


LED panel

MODUS FIT6000, LED panel, nanoprizma, recessed, LED 830, rectangle C, modul 600, driver 1400mA DALI

Code: FIT6000C3KN600/DALI

EAN: 8596099089641

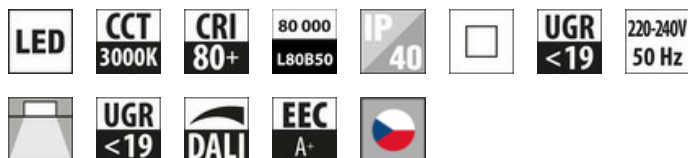

Vlastnosti svítidla

Product category:	Ceiling / wall luminaires	Degree of protection (IP):	IP40
Color housing:	White	Material housing:	Aluminium
Suitable for built-in mounting:	Yes	Made in Czech republic:	Yes

Světelný zdroj

Lamp type:	LED not exchangeable	Effective luminous flux (lm):	6400
System power (W):	57	Luminaire efficacy (lm/W):	112
Color temperature (K):	3000	Color rendering index CRI:	80-89
Rated life time L80/B50 (h):	80000	With lamp:	Yes
Colour of light:	White		
Energy efficiency class of the built-in lamp:	A++, A+, A (LED)		

Optický systém

Optical system:	KN	Light outlet:	Direct
Anti-glare limiting UGR:	19	Light sharing:	Symmetric
Material cover:	Plastic, structured	Fit for monitor workplace:	Yes
Radiation angle:	Extreme wide beam >80°		

Rozměry

Length (mm):	1196	Width (mm):	296
Height/depth (mm):	15	Built-in height/depth (mm):	15
Raster (mm):	600	Size version:	M
Weight (kg):	3,5		

Elektrické vlastnosti

Protection class:	II	Voltage type:	AC
Type of control gear:	LED operating device current-controlled	Nominal voltage (V):	220...240
Control gear included:	Yes	Dimming DALI:	Yes