


Download

 DXF 2D
 - 371.dxf

371 spina per innesto rapido

Utilizzare sempre per fila continua con cavo o con tubo, aggiungendo l'accessorio 370. Pressacavo con cavo d'ingresso min diametro 9 max diam 12.

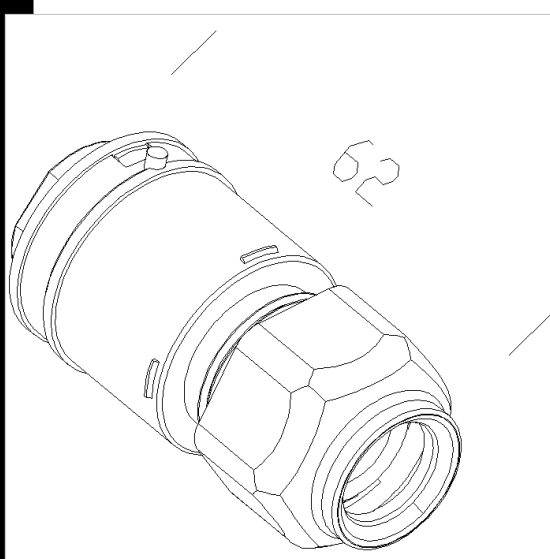

Code	Kg	WTot	Colour
998041-00	0,04	0 W	GRIGIO

Prodotti


- 921 Hydro T8 EL



- 959 Hydro - connettore spina



- 921 Hydro T5



- 927 Echo - monolampada LED



- 957 Echo - monolampada LED - High Performance



- 927 Echo - bilampada LED - Energy Saving



- 927 Echo - monolampada LED - Energy Saving



- 927 Echo - bilampada LED - energy PLUS



- 957 Echo - bilampada LED - High Performance



- 961 Hydro LED - Money Saving



- 962 Hydro LED - Energy Saving



- 962 Hydro LED - Energy Saving FS



- 962 Hydro LED - Energy Saving 3000/6500K



- 927 Echo FS - bilampada LED - Energy Saving



- 927 Echo 3000/6500K - monolampada LED - Energy Saving



- 927 Echo 3000/6500K - bilampada LED - Energy Saving



- 957 Echo FS - bilampada LED



- 927 Echo - bilampada LED -



- 960 Hydro T5 - connettore

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated