

Double Box with TwinCONTACT
Part no. 1649




- screwless spring terminals
- CEE and sockets SCHUKO® in one enclosure
- Also available with shock-proof sockets to comply with French/Belgian, Danish and Swiss standards

Technical specifications

CEE 16 A, 5 p, 400 V	1
SCHUKO® 16 A, 230 V	1
Protection type	IP 44
Shutter	false
Enclosure material	Plastic
Weight	375 g
Declaration of Conformity	VDE, EAC, Kema

Drawing

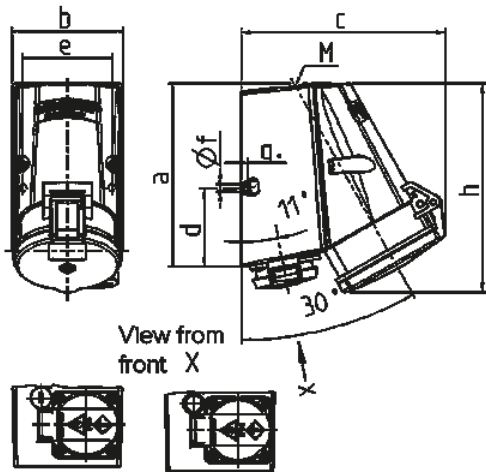

Drawing	Amp.	16		32
1 MB 354	Poles	4	5	5
Dim. in mm	a	141	141	141
	b	84	84	85
	c	136	140	158
	d	61	61	61
	e	68	68	68
	f	5.5	5.5	5.5
	g	5	5	5
	h	142	145	161
	M	25	25	25
Max. cable diam. (mm)		18	18	18
Terminal for cond. cross section (mm²) min.-max.		1.5 —4	1.5 —4	2.5 —10