



KX

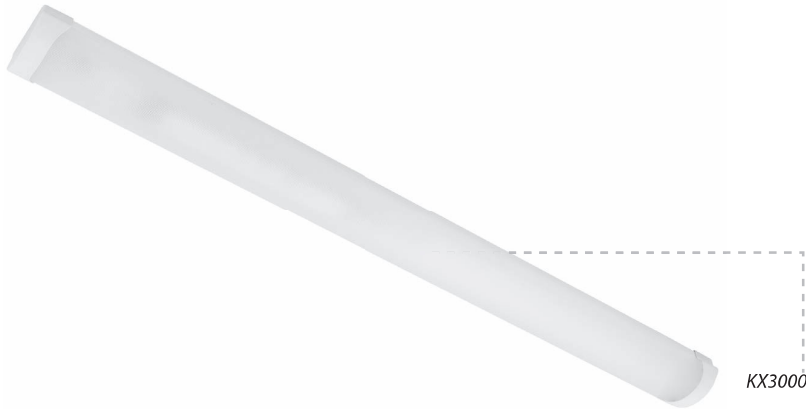

η_{ef} (lm/W)
124-150



KX

LED fittings with cover

Body:

White painted metal sheet
White plastic endcaps

Optic:

KO - opal PMMA cover
KMO - MAT opal PMMA

Application:


These light fittings can be used as surface mounted or suspended.
- for shops, schools, social, sports and living spaces

Accessories:

Protection grid - OM
ZH/UNI4 - universal 4-wires suspension


2200	2700	3000	4000	5700	6500	MIX	RGB	
✗	○	○	●	○	○	○	✗	✗
●	○	○	○	✗	○	○	✗	✗

● default ○ optional ✗ not possible

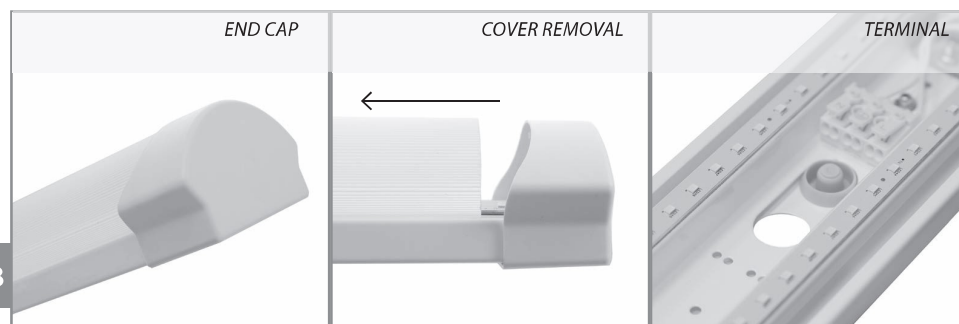

Codes: KX5000M3KO/ND

KX	5000	M	3	KO	/ND
luminaire type	Light output	body length: S = 600 mm M = 1200 mm L = 1500 mm	Color temperature 3 = 3000K, 4 = 4000K, 6 = 6500K	Cover type: KO = opal KM = matopal	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI

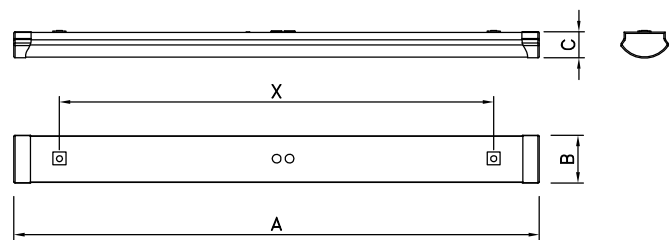

	W	lm	A	B	X	C	kg	
KX2000 SKO	20	2 500	630	110	498	60	1,8	
KX4000 SKO	34	4 200						
KX3000 MKO	18	2 600	1210		1000	60	2,5	
KX4000 MKO	25	3 800						
KX5000 MKO	36	5 400						
KX3000 LKO	22	3 300	1500		1200		3	
KX6000 LKO	47	6 900						
KX8000 LKO	58	8 200						

lm – luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.