

Gyro IsoSafe DimToWarm Matte white



Article code:

5046 901231

EAN:

7021989012313



Light technic

Type of light source:	LED (not exchangeable)
Wattage:	6W
System wattage:	7W
Luminous flux:	520lm
Efficacy:	75 lm/W
Voltage:	230V
Colour temperature:	2000-2800K
Colour rendering (CRI):	Ra>95
MacAdams factor:	SDCM: 3
Lifetime:	L80/B20>50,000
Light distribution:	Direct
Beam angle:	42°

Control/Dimming

Type:	Trailing edge dimming
-------	-----------------------

Protection

Luminaire class:	Class II
Ingress protection rating:	IP44
Ta nominal:	Ta=25°C

Energy and approvals

Energy class:	A++
Approval:	CE

Materials and finish

Housing:	Aluminium
Colour:	Matte white (RAL 9003)
Optics:	Glass

Mounting/Connection



Mounting:	Recessed, Indoor
Plug:	Screwless terminal block

Dimensions (mm)

Height (H):	56
Diameter (D):	94
Cut-out:	83
Ceiling void depth:	54
Distance to flammable materials:	0mm
Weight (brutto/netto):	0.5

Packaging

Packing dimensions:	115 x 115 x 95
---------------------	----------------

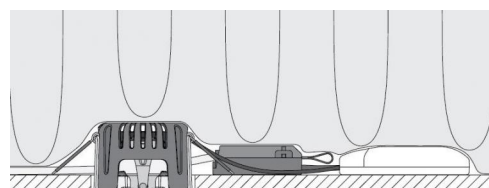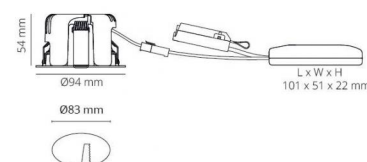

7 0 2 1 9 8 9 0 1 2 3 1 3