


Download

DXF 2D
- 1898.dxf
3DS
- disano_1898_rodio.3ds
3DM
- disano_1898_rodio.3dm
Montaggi
- Rodio.pdf



1898 Rodio - COB asymmetric

Housing: in die-cast aluminium with cooling fins.
Reflector: in high-grade 99,99 aluminium with PVD treatment.
Diffuser: 5mm thick tempered glass, resistant to thermal shocks and impacts.
Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.
On request, coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. 2200K - AMBER (sub-code -73)
Equipment: external connector for quick installation. Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve. Power factor: 0,9.
Photobiological risk: exempt, pursuant to EN62471.
Luminous flux maintenance 80%: 50.000h (L80B20). Wind surface: L:390cm² F:1420cm².

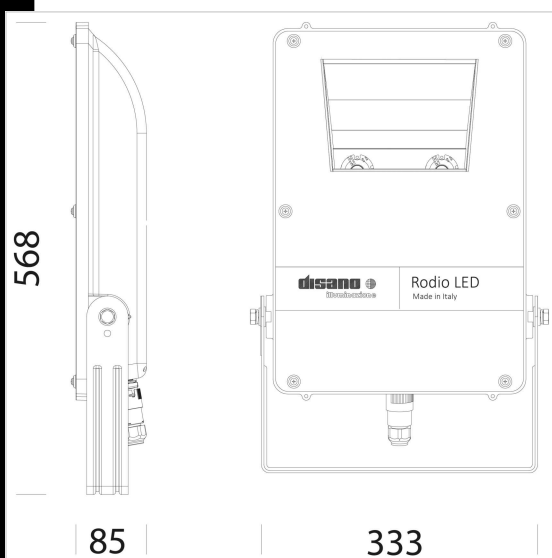

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
414920-00	CLD CELL	5.50	LED COB-8553lm-4000K-CRI 80	79 W	GRAFITE
414921-00	CLD CELL	5.42	LED COB-10932lm-4000K-CRI 80	103 W	GRAFITE
414922-00	CLD CELL	5.53	LED COB-14199lm-4000K-CRI 80	129 W	GRAFITE
414920-39	CLD CELL	5.41	LED COB-8125lm-3000K-CRI 80	79 W	GRAFITE
414921-39	CLD CELL	5.45	LED COB-10386lm-3000K-CRI 80	103 W	GRAFITE
414922-39	CLD CELL	5.57	LED COB-13347lm-3000K-CRI 80	129 W	GRAFITE
414923-00	CLD CELL	6.40	LED COB-21050lm-4000K-CRI 80	195 W	GRAFITE

Accessories



- 333 pole mounting diam.60



- 334 pole mounting diam. 76



- 350 protection guard

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated