


EXQ PURE BLACK 300/500 V

Black, halogen-free unscreened installation cable

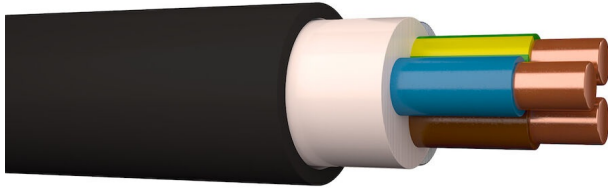

Halogen-free, flame retardant and self-extinguishing cable. Smoke in the event of a fire is limited, transparent (facilitates evacuation) and not harmful to electronic equipment. Suitable for fixed installation, pipe, duct, in or under plaster, and suspended in the suspension cable. Indoor and outdoor use, but not the land or water. UV protected for outdoor use in the Nordic countries. The conductor insulation shall be protected against UV light that can occur for example in light fixtures and illuminated signs.

Cable marking example	DRAKA EXQ PURE SVART 3G2,5 mm ² 300/500 V D-s2,d2,a1, metermärkt
Core identification	3 cores: g/y, blue, brown 5 cores: g/y, blue, brown, black, grey
Conductor material	Copper
Core insulation material	XLPE
Material outer sheath	Halogenfree polymer
Cable shape	Round
Reaction-to-fire class (acc. EN 13501-6)	Dca
Smoke development class (acc. EN 13501-6)	s2
Euro class flaming droplets/particles (acc. EN 13501-6)	d2
Euro class acidity (acc. EN 13501-6)	a1

Product name	Colour outer sheath	Outer diameter [mm]	Cable weight [kg/km]	Delivery length [m]	Packaging	External article code
EXQ Pure Black 3G2,5	Black	9.6	154	200		0449313
EXQ Pure Black 3G1,5	Black	8.2	105	50	Coil	0449301
EXQ Pure Black 3G1,5	Black	8.2	105	300		0449303
EXQ Pure Black 5G1,5	Black	9.8	159	50	Coil	0449321
EXQ Pure Black 5G1,5	Black	9.8	159	200		0449323
EXQ Pure Black 5G2,5	Black	11.4	232	150		0449333