



Electrical

Initial input power	35 W
Input voltage	220 - 240 V
Frequency	50 - 60 Hz

Optical

Optic name	L01
Optic type	TYPE-III
Luminous flux	3991 lm
Luminous efficacy	114 lm/W
Performance temperature Tq	+25 °C
Constant light output	Yes
Color rendering index	≥70
Color temperature	3000 K
Color tolerance	5 SDCM
ULOR	0
LED quantity	8

Lifetime

Lumen depreciation	L100 after 100 000 h
Ambient temperature range	-40 ... +50 °C

Protection

Protection class	Class I
Surge protection L-N	At least 6 kV
Surge protection L/N-PE	At least 6 kV
Ingress protection	IP66
Impact resistance	IK08

Housing

Body material	Die-cast aluminium
Cover material	Flat tempered glass
Optic material	PMMA
Color	RAL 9006 (white aluminium)
Dimensions	400 x 165 x 78 mm
Max wind load area SCd	0.02 m ²
Mounting	Side-entry, 42, 48, 60 / post top, 60 mm
LED module replaceability	Replaceable by a professional
Driver replaceability	Replaceable by a professional
Accessibility of electronic components	With tools


Controls

Dimming	Midnight dimming
----------------	------------------


Approvals

CE	Yes
UKCA	Yes
ENEC	Yes
ENEC+	Yes
RoHS	Yes
International EPD System	Yes
Vibration test (EN 60068-2-6)	2g

Light distribution

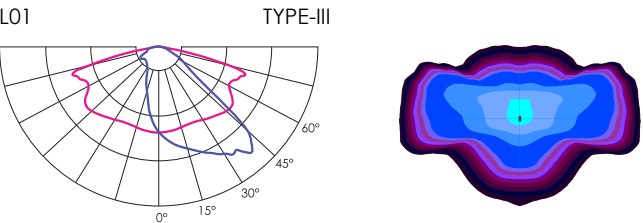

Dimensions

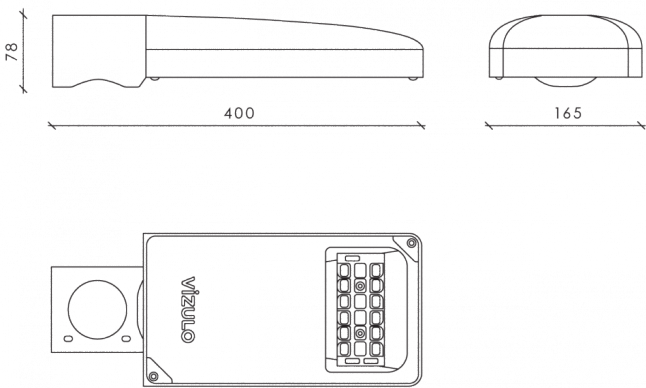

Product images

