



CE UK CA ENE RoHS EPD®

Electrical	Initial input power	35 W
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
Optical	Optic name	L35
	Optic type	TYPE-IV
	Luminous flux	3669 lm
	Luminous efficacy	105 lm/W
	Performance temperature Tq	+25 °C
	Constant light output	Yes
	Color rendering index	≥70
	Color temperature	3000 K
	Color tolerance	5 SDCM
	ULOR	0
	LED quantity	8
Lifetime	Lumen depreciation	L100 after 100 000 h
	Ambient temperature range	-40 ... +50 °C
Protection	Protection class	Class I
	Surge protection L-N	At least 6 kV
	Surge protection L/N-PE	At least 6 kV
	Ingress protection	IP66
	Impact resistance	IK08

Housing

Body material	Die-cast aluminium
Cover material	Flat tempered glass
Optic material	PMMA
Color	RAL 9006 (white aluminium)
Dimensions	400 x 165 x 78 mm
Max wind load area SCd	0.02 m ²
Mounting	Side-entry, 42, 48, 60 / post top, 60 mm
LED module replaceability	Replaceable by a professional
Driver replaceability	Replaceable by a professional
Accessibility of electronic components	With tools


Controls

Dimming	Midnight dimming
---------	------------------


Approvals

CE	Yes
UKCA	Yes
ENEC	Yes
ENEC+	Yes
RoHS	Yes
International EPD System	Yes
Vibration test (EN 60068-2-6)	2g

Light distribution

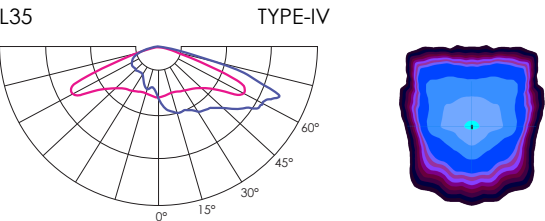

Dimensions

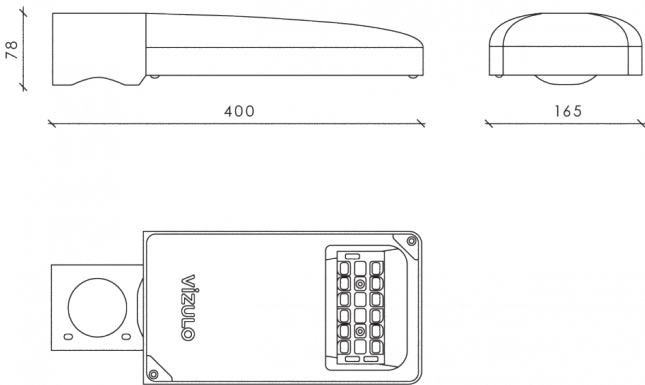

Product images

