


Date	
Customer	
Project	
Гуре	

Thimble Recessed Adjustable 74 1x LED 2700K Medium DE Champagne Brushed Anodised



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.



Spacifications	-		
Specifications	116210	141	
Light Source Type	LED		
LED Type	BRIDGELUX V6 HD G7		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L80B20 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	100 100 100 100 61		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Lens		
Measured beam angle (°)	27.3		
Input Voltage	Constant Current Driver Required		
Electrical Class			
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	ø70		
Mounting depth (mm)	110.0		
Adjustability	H 360° V 30°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Champagne, Brushed Anodised		
Gross weight (g)	199.0		
Drive current (mA)	350	500	
Forward voltage (Vf)	16.4	16.9	
Connected load (W)	5.7	8.5	
Delivered lumens (Im)	440	593	
Efficacy (Im/W)	77	70	
Glare rating	0	0	
Remark	• 4000ł	K on request	




TM30 & CRI diagram






Light distribution & beam diagram

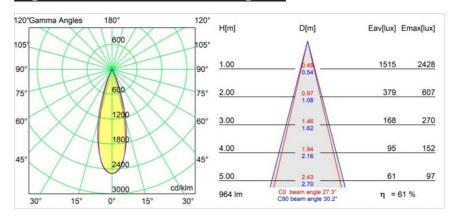





Installation Accessories




11624030 Conbox 140x250x100x210



11624130 Conbox 140x400x100x210



12292630 Gypsum fibreboard 150x150




12292730 Gypsum fibreboard 300x150




11624430 Concrete ring Ø70 for standard concrete boxes






12290130 Gypkit 190X190 - Ø70



59 ≥111

11624530 Ring Recessed Trimless 70



11624630 Plaster Kit Recessed Trimless 150x150 - 70

Choose a required accessory