



Date
Customer
Project
Туре

Smart Cake Recessed Adjustable 115 1x LED 2700K Flood DE White Structure



The 3 original designs, Smart Kup, Lotis and Cake still manage to steal the hearts of interior designers. And this goes for the entire Smart family. Smart's accessibility and extreme versatility are arguably fit for any expression. Mix and match accent lighting, up and downlight, fixed or adjustable, a mosaic of shapes, sizes, colours and mounting options, and create a playful installation.





Specifications				
Material	12771309			
Light Source Type	LED			
LED Type	BRIDGELUX V8G6			
LED technology	LED COB			
CRI	Min. 90			
Colour Temperature	2700K			
Lifetime	L80B20 @50,000 Hours			
Lamp Included	Yes			
Number of Light Sources	1			
Binning (SDCM)	3			
Light Direction	Down			
Optic	Reflector			
Measured beam angle (°)	35.3			
Input Voltage	Constant Current Driver Required			
Electrical Class	III			
IP Rating	20			
Glow wire rating (°C)	960			
Indoor/Outdoor	Indoor			
Application	Ceiling, Wall			
Mounting	Recessed			
Cut-out size (mm)	ø108			
Mounting depth (mm)	100.0			
Adjustability	H 355° V 30°			
Distance to Lighted Object (m)	0,1			
Primary Colour & Primary Finish	White, Structure			
Gross weight (g)	488.0			
Drive current (mA)	350	500	700	
Forward voltage (Vf)	17.8	18.4	19.3	
Connected load (W)	6.2	9.2	13.4	
Delivered lumens (Im)	443	595	765	
Efficacy (Im/W)	71	65	57	
Glare rating	21	22	23	
Remark	3500K on request			




TM30 & CRI diagram






Light distribution & beam diagram

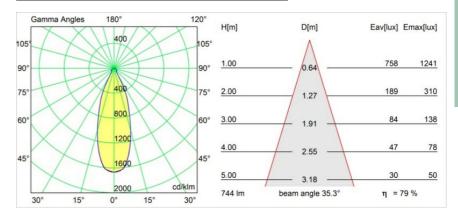




Decorative Accessories



 12810009
 Smart mask 115 1x white struc

 12810032
 Smart mask 115 1x black struc

 12810046
 Smart mask 115 1x gold




 12810109
 Smart mask 115 2x white struc


 12810132
 Smart mask 115 2x black struc

 12810146
 Smart mask 115 2x gold


Installation Accessories



10889830 Conbox 192x190x130



12290530 Gypkit 190X190 - Ø108



12810230 Recessed ring 115

Choose a required accessory

