


Date

Customer


Project

Type

K 77 Recessed Adjustable 77 lx LED 3000K Flood Trailing Edge RD White Structure

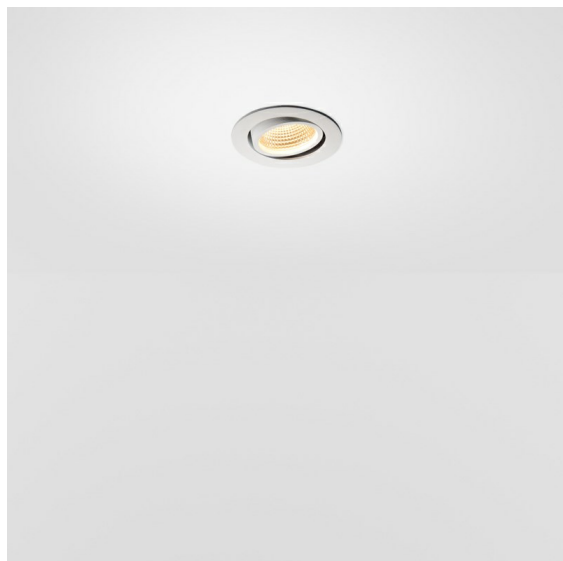



Every project needs a spotlight for general lighting. K is our suggestion for those who like to keep things simple yet flexible. K comes in two sizes, 80 and 89 mm, with a flat or sloping edge, in aluminium, or with a white or black structure. Available with halogen and LED. Choose the directional model for a greater interplay of light and more versatility.




Specifications

Material	14051509
Light Source Type	LED
LED Type	BRIDGELUX V8G6
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	32.2
Input Voltage	230V
Luminaire power (W)	12.0
Electrical Class	II
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø70
Mounting depth (mm)	60.0
Adjustability	H 360° V -30°/+30°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	307.0
Delivered lumens (lm)	712
Efficacy (lm/W)	59
Glare rating	21


TM30 & CRI diagram

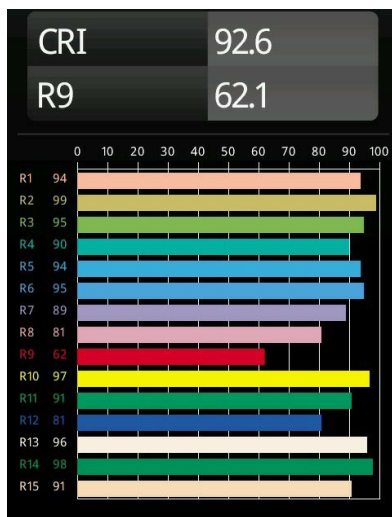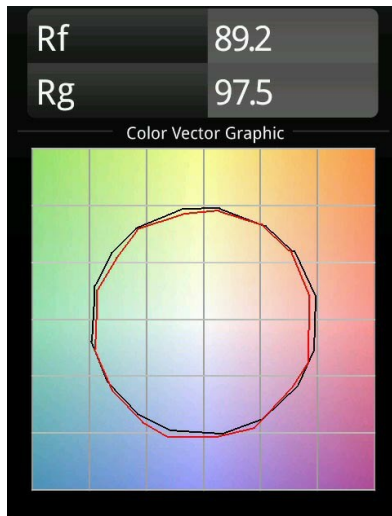


Light distribution & beam diagram

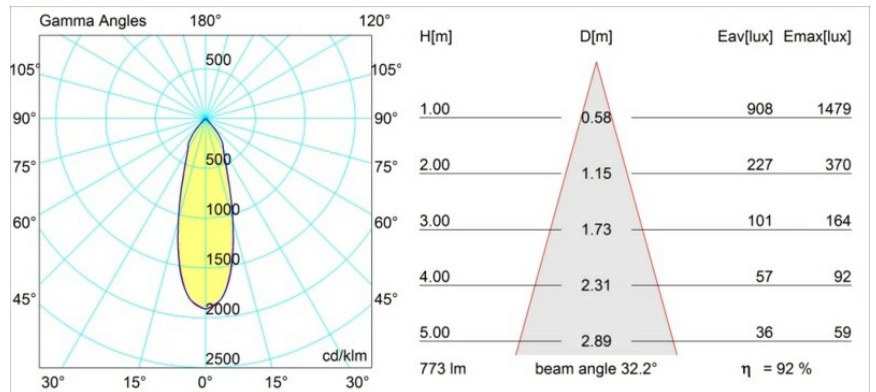


Decorative Accessories




- 14052009** K-set 77 1x white struc
14052032 K-set 77 1x black struc
14052071 K-set 77 1x donkey grey struc



- 14052109** K-set 77 2x white struc
14052132 K-set 77 2x black struc
14052171 K-set 77 2x donkey grey struc




- 14052209** K-set 77 3x white struc
14052232 K-set 77 3x black struc
14052271 K-set 77 3x donkey grey struc




- 14052309** K-set 77 4SQx white struc
14052332 FFD_K-set 77 4SQx black struc
14052371 K-set 77 4SQx donkey grey struc

Installation Accessories



10889830 Conbox 192x190x130



12290130 Gypkit 190X190 - Ø70

Choose a required accessory