


Date
Customer
Project
Type


M-LED 70 2700K medium DE white struc

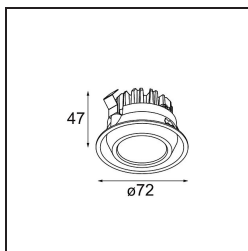


Specifications

Material	14070109
Light Source Type	LED
LED Type	BRIDGELUX V8G6
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Optic	Reflector
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	183.0
Drive current (mA)	350 500
Forward voltage (Vf)	17.8 18.4
Connected load (W)	6.2 9.2
Delivered lumens (lm)	519 667
Efficacy (lm/W)	84 73
Glare rating	20 21

TM30 & CRI diagram

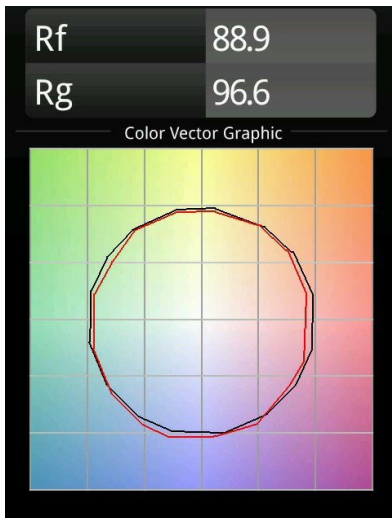

Light distribution & beam diagram

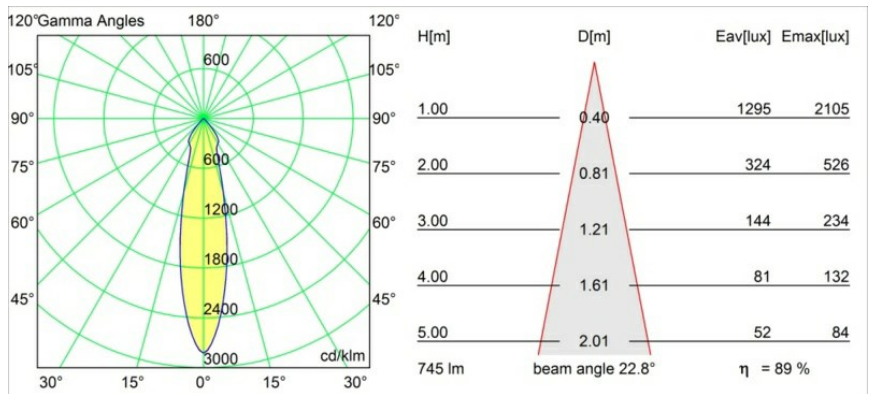

Diagrams