



|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

## Lotis Round Recessed 82 1x M-LED DE Black Matt

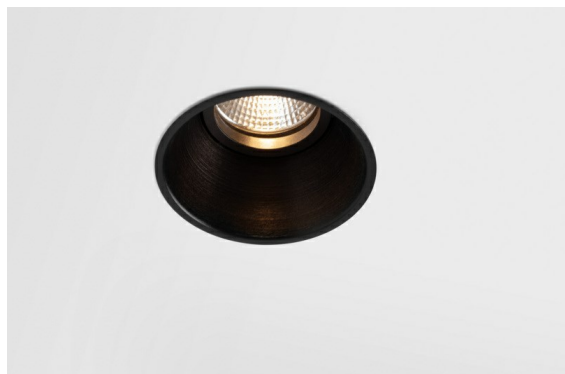


Lotis Round is a recessed spotlight with a slight trim. The hallmark of this luminaire is its deeply recessed cone, which holds the light source. Known for its effortless design and high functionality, Lotis Round comes in different diameters and with various types of light sources.



### Specifications


|                                 |                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------|
| Material                        | 13080002                                                                                                 |
| Light Source Type               | M-LED                                                                                                    |
| Lifetime                        | L80B20 @50,000 Hours                                                                                     |
| Lamp Included                   | No                                                                                                       |
| Number of Light Sources         | 1                                                                                                        |
| Light Direction                 | Down                                                                                                     |
| Optic                           | Reflector                                                                                                |
| Input Voltage                   | Constant Current Driver Required                                                                         |
| Electrical Class                | III                                                                                                      |
| IP Rating                       | 20                                                                                                       |
| Glow wire rating (°C)           | 960                                                                                                      |
| Indoor/Outdoor                  | Indoor                                                                                                   |
| Application                     | Ceiling                                                                                                  |
| Mounting                        | Recessed                                                                                                 |
| Cut-out size (mm)               | ø76                                                                                                      |
| Mounting depth (mm)             | 95.0                                                                                                     |
| Adjustability                   | Not Applicable                                                                                           |
| Distance to Lighted Object (m)  | 0,1                                                                                                      |
| Primary Colour & Primary Finish | Black, Matt                                                                                              |
| Gross weight (g)                | 92.0                                                                                                     |
| Drive current (mA)              | 350                                                                                                      |
| Delivered lumens (lm)           | 391                                                                                                      |
| Efficacy (lm/W)                 | 63                                                                                                       |
| Remark                          | <ul style="list-style-type: none"> <li>This is not a complete product. Light module required.</li> </ul> |

## M-LED Module

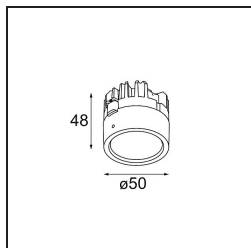


- **14060005** M-LED 50 2700K spot DE alu
- **14060105** M-LED 50 2700K medium DE alu
- **14060205** M-LED 50 2700K flood DE alu
- **14060305** M-LED 50 3000K spot DE alu
- **14060405** M-LED 50 3000K medium DE alu
- **14060505** M-LED 50 3000K flood DE alu
- **14060605** FFD\_M-LED 50 3500K spot DE alu
- **14060705** FFD\_M-LED 50 3500K medium DE alu
- **14060805** FFD\_M-LED 50 3500K flood DE alu
- **14060905** M-LED 50 4000K spot DE alu
- **14061005** M-LED 50 4000K medium DE alu
- **14061105** M-LED 50 4000K flood DE alu
- **14061205** M-LED 50 1800-3000K warm dim spot DE alu
- **14061305** M-LED 50 1800-3000K warm dim medium DE alu
- **14061405** M-LED 50 1800-3000K warm dim flood DE alu

## Installation Accessories

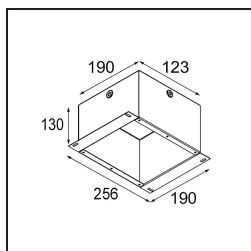

**10889830** Conbox 192x190x130



**12290830** Gypkit 190x190 - Ø76

■ Choose a required accessory