


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |



### *Pista Linear Light Track 48V 1136 1x LED 3000K DALI DI Black Structure*

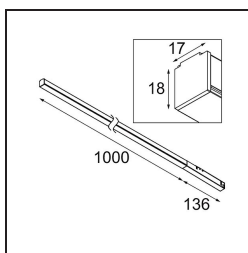

#### **Specifications**

|                                 |   |
|---------------------------------|---|
| Material                        | 13414632  |
| Light Source Type               | LED   |
| LED Type                        | PISTA LINEAR (FLAPS)  |
| LED technology                  | LED flexible PCB  |
| CRI                             | Min. 90   |
| Colour Temperature              | 3000K   |
| Lifetime                        | L80B10 @50,000 Hours  |
| Lamp Included                   | Yes   |
| Number of Light Sources         | 1   |
| Binning (SDCM)                  | 3   |
| Light Direction                 | Down  |
| Input Voltage                   | 48Vdc   |
| Luminaire power (W)             | 17.0  |
| Electrical Class                | III   |
| IP Rating                       | 20  |
| Glow wire rating (°C)           | 960   |
| Dimming Protocol                | DALI  |
| DALI Standard                   | DALI version-1  |
| Indoor/Outdoor                  | Indoor  |
| Application                     | Ceiling, Wall   |
| Adjustability                   | Not Applicable  |
| Distance to Lighted Object (m)  | 0,1   |
| Primary Colour & Primary Finish | Black, Structure  |
| Gross weight (g)                | 737.0   |
| Delivered lumens (lm)           | 1033  |
| Efficacy (lm/W)                 | 60  |
| Glare rating                    | 27  |
| Remark                          | <ul style="list-style-type: none"> <li>• 3500K and 4000K on request</li> <li>• This black Track 48V linear module comes with a black track adapter. Exceptions are only possible on request.</li> <li>• This is not a complete product. Pista track 48V system required.</li> </ul> |

### TM30 & CRI diagram

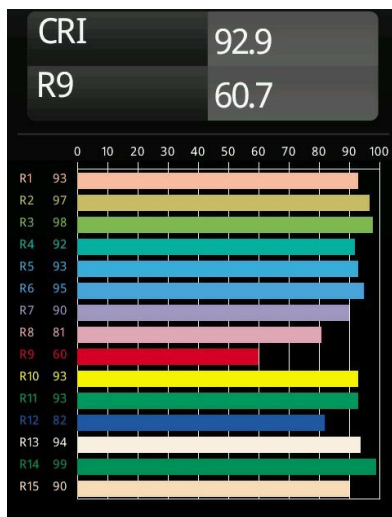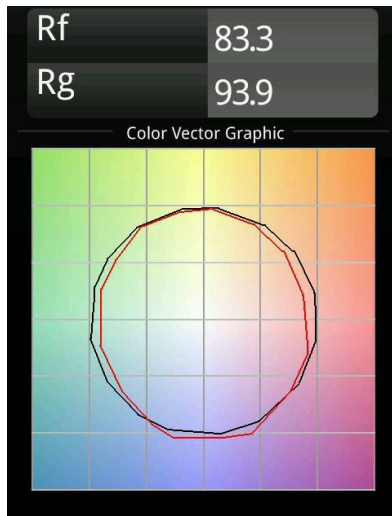

### Light distribution & beam diagram

