



## Step Round

Signalling Step Round 4 LED warm-white 3000K CRI 80 ON-OFF White IP20 194lm

### Technical features

Luminaire total power: 4W  
Real lumens: 194  
Real lm/W: 49  
Correlated Colour Temperature (CCT): LED warm-white 3000K  
Structure material: Aluminium  
Structure finish: White  
Voltage / frequency: 220-240V/50-60Hz  
Dimming protocol: ON-OFF  
Power Factor: 0.98  
Useful life: 36,000h L70B30  
Warranty: 5 años  
Easily recyclable luminaire



### Luminotechnic features

TM30 RG: 95  
TM30 RF: 85  
Melanopic ratio: 0.501  
CRI: 80  
MacAdam steps: 3  
Photobiological risk: RGO

Lampholder	Quantity	Light source power (W)
LED	1	4W


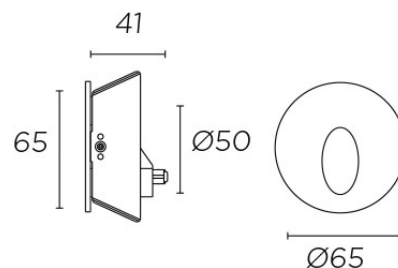



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

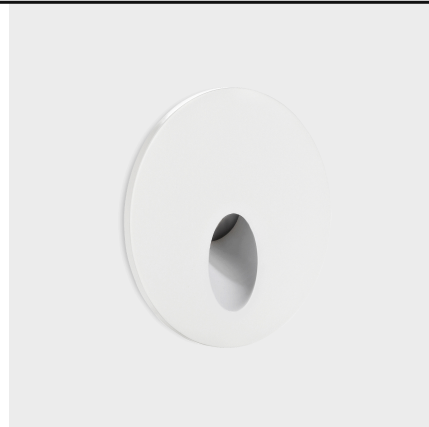

## Step Round

Signalling Step Round 4 LED warm-white 3000K CRI 80 ON-OFF White IP20 194lm

### Logistics



x 50

Net weight (kg): 0.19

Packaged weight (kg): 0.24

Packaging: 80mm x 80mm x 95mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Step Round

Signalling Step Round 4 LED warm-white 3000K CRI 80 ON-OFF White IP20 194lm

### Accessories included



Recess case

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.