




Sign

Signalling Sign 2.2 LED warm-white 3000K CRI 80 White IP20 80lm

Technical features

Luminaire total power: 2.2W
Real lumens: 80
Real lm/W: 36
Correlated Colour Temperature (CCT): LED warm-white 3000K
Lens / reflector angle: FLOOD 78°
Structure material: Aluminium
Structure finish: White
Equipment necessary but not included
Voltage / frequency: 3V/max.700mA
Useful life: 50,000h L80B20
Warranty: 5 años
Easily recyclable luminaire



Luminotechnic features

CRI: 80
MacAdam steps: 3
Photobiological risk: RG2
UGR crosswise: 22.3
UGR lengthwise: 5.6

Lampholder	Quantity	Light source power (W)
LED	1	2.2W



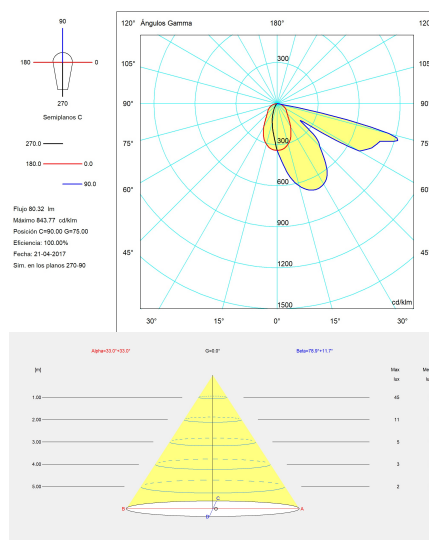



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

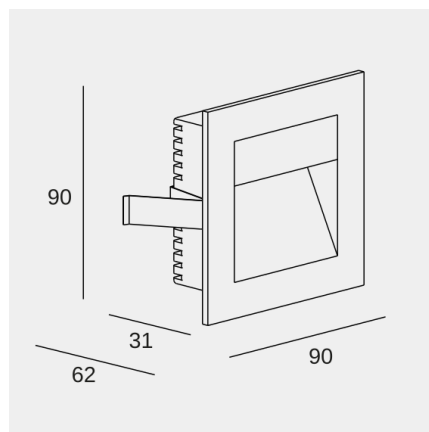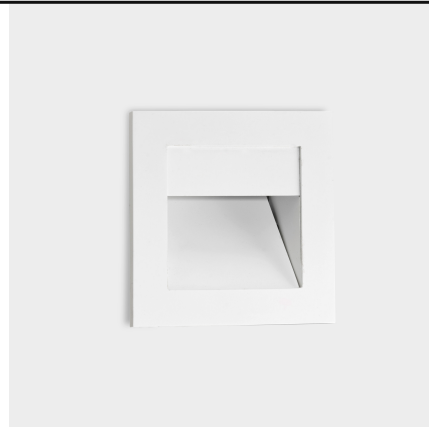

Sign

Signalling Sign 2.2 LED warm-white 3000K CRI 80 White IP20 80lm

Logistics



x 24

Net weight (kg): 0.27

Packaged weight (kg): 0.38

Packaging: 135mm x 130mm x 75mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Sign

Signalling Sign 2.2 LED warm-white 3000K CRI 80 White IP20 80lm

Accessories included



Recess case

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.