


## Data sheet

Commercial Art.No.: 93.420.4653.0

distributor BST14I2V 2P1T PB02

BST14i2 Distributor, without fastening option, number of poles 2, rated voltage 50 V, rated current 3 A, number of inputs 1, number of outputs 2, color of coding/ contact carrier pastel blue

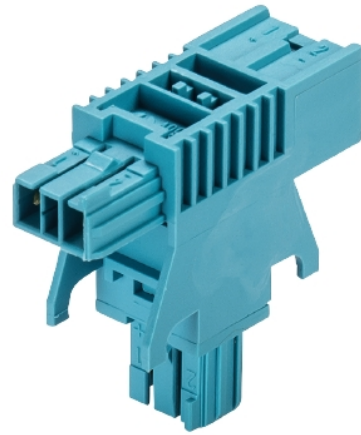

Commercial Art.No.	93.420.4653.0
EAN	4015573693883
Order Unit	1

certificates / approvals



## Technical data

### general

rated current	3 A
rated voltage	50 V
rated impulse voltage	0.8 kV
pollution degree	2
mechanical coding	yes
lockable	self-locking (unlocking by hand)
color of coding/ contact carrier	pastel blue
marking of poles	1+, 2-

### model

number of inputs	1
number of outputs	2
type of fastening	yes
degree of protection (IP)	IP20
type of distributor	T-distributor

### material

housing material	polyamide
halogen free	yes
contact material	CuBe
fire load	0.034 kWh
insulation components continuous temperature	100 °C

surface finish	gilt
----------------	------

#### dimensions

length	37 mm
width	13 mm
height	34 mm

#### classification






ECLASS 11	
ECLASS 8.1	27440603
ETIM 9.0	EC002567
ETIM 8.0	EC002567
ETIM 7.0	EC002567
ETIM 6.0	EC002567
ETIM 5.0	EC002567
ETIM 4.0	EC002567

#### product compliance

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant


#### Fits with

Commercial Art.No.:	Article-type description:	Description:
93.421.4553.1	connector BST14I2F B1 ZR1 S MPB02	BST14i2 Connector, number of poles 2, female, connection type spring clamp connection, rated voltage 50 V, rated current 3 A, cable diameter 5.5 - 6.5 mm, color of coding/ contact carrier pastel blue
93.422.4553.1	connector BST14I2F S1 ZR1 S MPB02	BST14i2 Connector, number of poles 2, model male, connection type spring clamp connection, rated voltage 50 V, rated current 3 A, color of coding/ contact carrier pastel blue

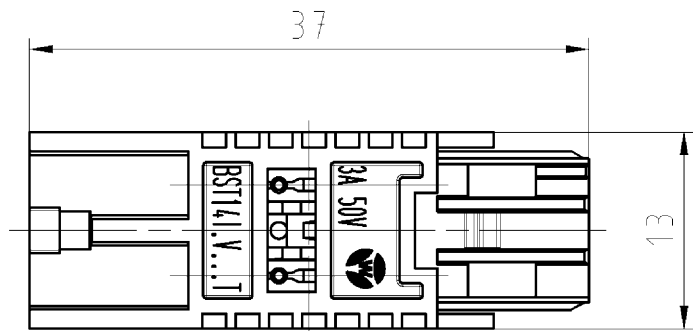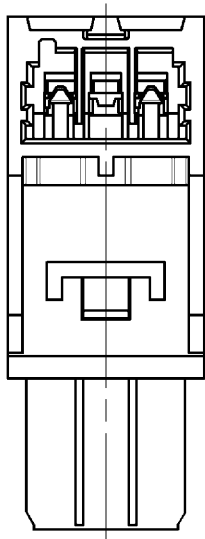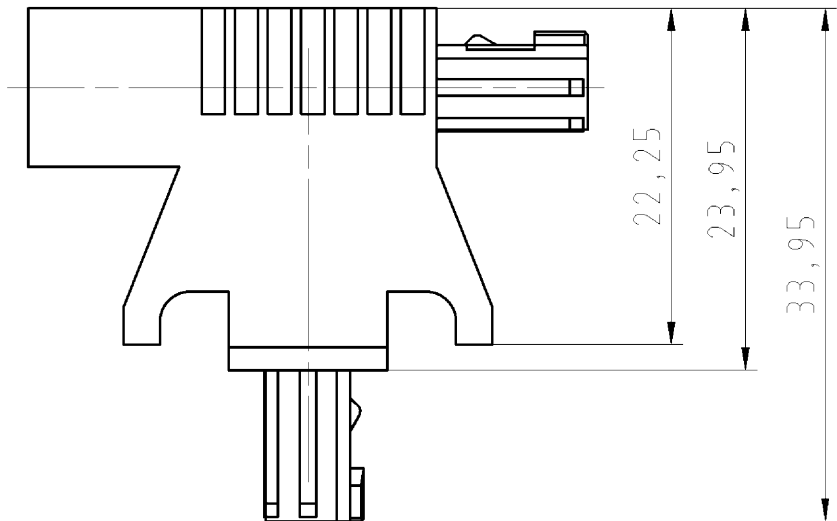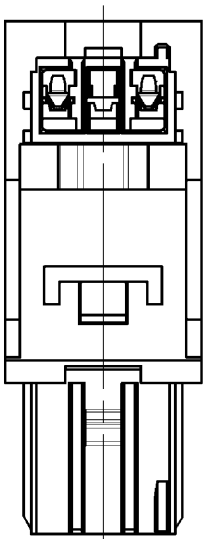

M 1:1

Typ: BST1412V\_2P1T\_\_\_\_\_PB02

Tolerierung nach DIN 7167/Tolerance system acc. to DIN 7167. (This DIN-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach UU-TQM-05/03 ist einzuhalten. Conformity with Wieland document UU-TQM-05/03 (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach - General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1.Verwendung: - First Use:		Blatt: 1 von 1 Sheet: of 1		
		 Werkstoff/Material		2012		Tag/Date		Name	
				gezeichnet drawn		16.04.		Ritter	
				geprüft checked					
				Normgepr. Stand. check					
		Maßstab/Scale		2:1					
		Vol.		mm <sup>3</sup> Off./Surf.		mm <sup>2</sup>		Ersatz für/Replacement for: -	
						Type		Benennung/Title	
								Verteiler	
								Distribution unit	
								BST14 Verteiler steckbar/BST14 Distribution unit pluggable	
								Dimmen/dim	
Index		Datum / Blatt Date / Sheet							
Änderung/Revision									

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.  
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.