

STANDING – H 495

datasheet

CODE NO. **5526**


- AN AN = Anthracite
- AG AG = Aluminum Grey
- CO CO = Corten

3K – 3000K / 4K – 4000K

86 mm

73 mm

H 495 mm

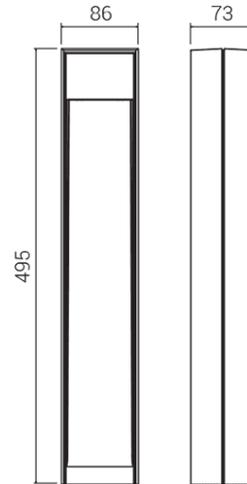

LAMP	LED
NOMINAL LUMEN	800
REAL LUMEN OUTPUT	423
WATTAGE	8W
VOLTAGE	220-240V 50/60Hz
IP	IP 65
IK	IK10 (20 joules)
CLASS	 Classe I
CERTIFICATION	 
CONFORMITY	EN 60598-1 +2-1
LED ENERGY CLASS	F

Parallelepiped-shaped garden post with downward light diffusion

Structure entirely in low-copper grade primary aluminium alloy

The front light, protected by an antidazzle louvre, is designed for walkways and paths

On the lower back the structure allows to insert a second luminaire with a diffused light

Mains voltage LED module, compatible with most phase-cut dimmers / CRI≥80

Watertight single or through wiring connection by optional watertight connectors (codes 1941-1942)

Double varnished finish after pickling, chromic passivation (trivalent chromium), epoxy primer and polyester powder coating

ON REQUEST:

2700K LED color temperature (code + 27K)