




PRETTUS S
1650 lm 4000 K




PRETTUS M
2150 lm 3000 K




PRETTUS L
3050 lm 4000 K




PRETTUS S

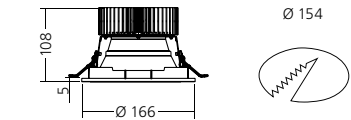

PRETTUS M

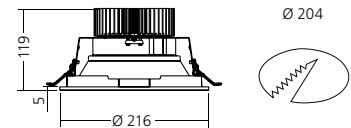

PRETTUS L

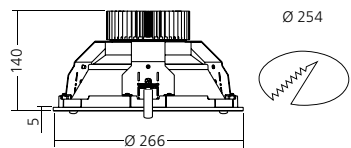

Type	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	beam angle	weight
	(lm)	(W)	CRI (Ra)	CCT (K)		(kg)
PRETTUS S	1300	15	80	3000	70°	0.8
PRETTUS S	1400	15	80	4000	70°	0.8
PRETTUS S	1750	20	80	3000	70°	0.8
PRETTUS S	1850	20	80	4000	70°	0.8
PRETTUS M	1950	20	80	3000	70°	1.0
PRETTUS M	2050	20	80	4000	70°	1.0
PRETTUS M	2350	24	80	3000	70°	1.0
PRETTUS M	2500	24	80	4000	70°	1.0
PRETTUS M	2850	29	80	3000	70°	1.0
PRETTUS M	3000	29	80	4000	70°	1.0
PRETTUS L	2750	29	80	3000	70°	1.3
PRETTUS L	2900	29	80	4000	70°	1.3
PRETTUS L	3150	33	80	3000	70°	1.3
PRETTUS L	3300	33	80	4000	70°	1.3

Luminous flux tolerance +/- 10%

The Company reserves the right to change any product specifications without prior notification.



LED

up to
3300
lm

up to
104
lm/W

80
Ra



PRETTUS

The round LED downlight! Available with a wide range of lumen packages in three different sizes and integrated emergency. The large emitting surface of the LED light source in combination with the microprisma reduces glare and maximises the visual comfort.

Mounting	Ceiling recessed
Optical system	Reflector
	Diffuser
Light distribution	Direct
Driver	Electronic control gear
	On request: Dimmable electronic control gear DALI
Materials	Housing: sheet steel
	Reflector: matt aluminium
	Diffuser: microprismatic PMMA
	Trim: die cast aluminium
	On request:
	Cover (IP54 optical part): transparent PC
Surface finish	Trim: white (RAL9003), other colours on request
Service lifetime	50 000 hours / L80
Ambient temperature	-25 °C / +35 °C
EEC	A++ / A+ / A

STANDARD

220-240V
50-60Hz

LED

ECG

IP 20

OPTICAL
IP 40

ON REQUEST

ECG
DALI

OPTICAL
IP 54

EMERGENCY