


## Dodici Track



|                               |                       |
|-------------------------------|-----------------------|
| <b>SKU</b>                    | : 701GB93030F0        |
| <b>Housing material</b>       | : Extruded Aluminum   |
| <b>Luminaire Color</b>        | : Black               |
| <b>Optic</b>                  | : Reflector           |
| <b>Reflector Color</b>        | : Specular Aluminium  |
| <b>Power supply</b>           | : Included ON/OFF     |
| <b>Luminaire dimension</b>    | : 347x76.8x40mm       |
| <b>Cut out dimension</b>      | : N/A                 |
| <b>Luminous Flux (lm)</b>     | : 1650 lm             |
| <b>LED power</b>              | : N/A                 |
| <b>System power</b>           | : 19.5W               |
| <b>System efficiency</b>      | : 85lm/W              |
| <b>Beam angle (°)</b>         | : 30°                 |
| <b>CCT (K)</b>                | : 3000K               |
| <b>CRI</b>                    | : 90                  |
| <b>Chromaticity tolerance</b> | : 3 MacAdam           |
| <b>Nominal fA</b>             | : N/A                 |
| <b>Nominal fV</b>             | : N/A                 |
| <b>Mains Voltage</b>          | : 220-240V / 50 -60Hz |
| <b>El. Class</b>              | : Class I             |
| <b>Lifetime</b>               | : 50000h              |
| <b>IP rating</b>              | : IP20                |
| <b>Net. Weight</b>            | : 1.3Kg               |
| <b>Warranty</b>               | : 5Y                  |

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K. Technical data can change without prior notice.

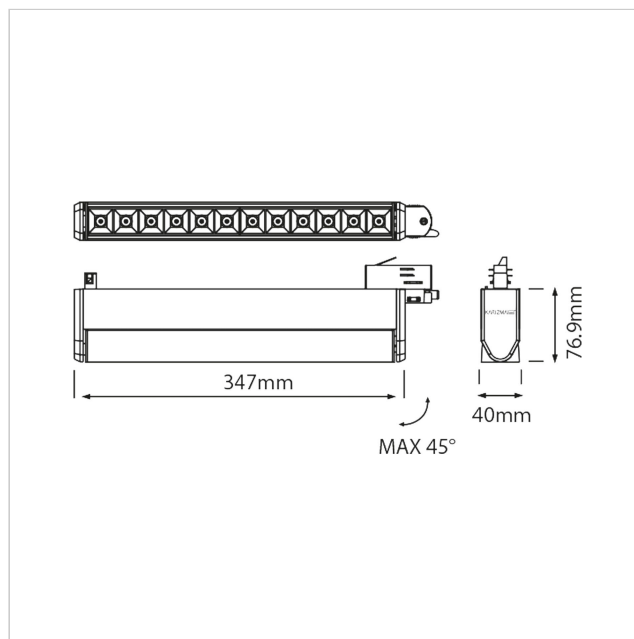