




Wall Light Silhouette Square

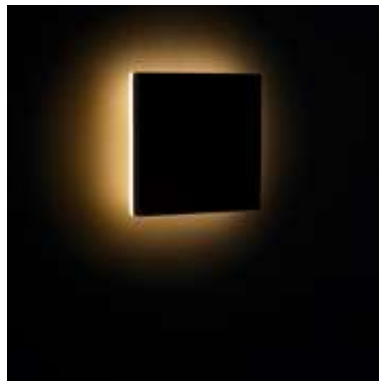

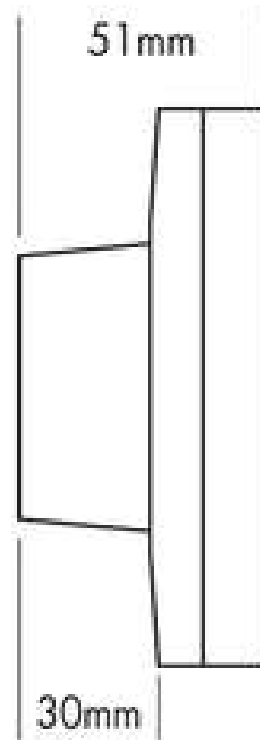

The PROLED WALL LIGHT SILHOUETTE series is designed for wall mounting and offers various design possibilities in architectural illumination.

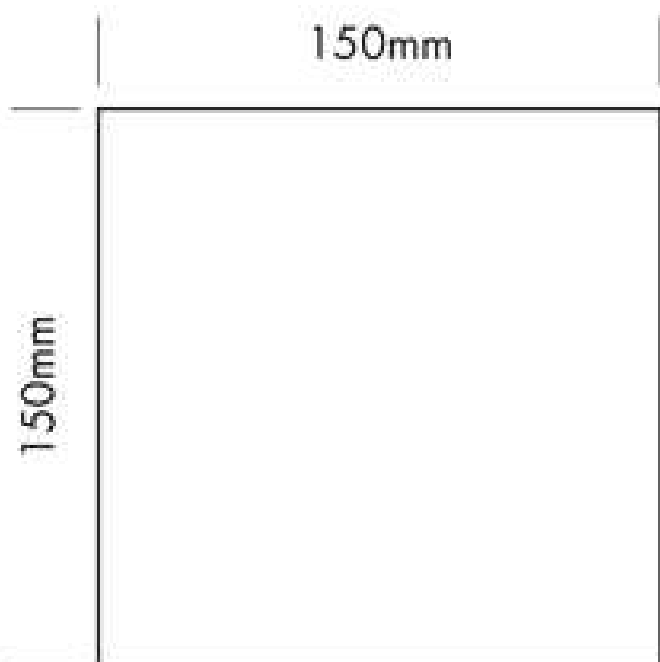

[PROLED WALL LIGHT SILHOUETTE MANUAL \(310.9 KB\)](#)

[EULUMDAT/IES INFORMATION](#)

TECHNICAL DATA

IP classification

IP54

Power source

240 VAC 50 Hz

Housing

aluminium and PC, white and black

Electrical connection	screw terminal
Average lifetime	50.000 h at L80/B10
Operating temperature range	-10° C till +45° C

PHOTOMETRIC DATA

LED type	SMD LEDs
Luminous flux	warm white 650 Lumen
Colour temperature	warm white 3000 K
CRI	80

Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.

PRODUCT TYPES

order code	colour	housing	LED pcs	LED power	power consumption*	weight	EEC
L1729S06W	warm	white	48	9,6	9,6 Watt	0,6	D
	white			Watt		kg	
L1729S06B	warm	black	48	9,6	9,6 Watt	0,6	E
	white			Watt		kg	

*Actual power consumption

MEMBER OF THE PROLED GROUP