


RF DW Remote Controller Wall



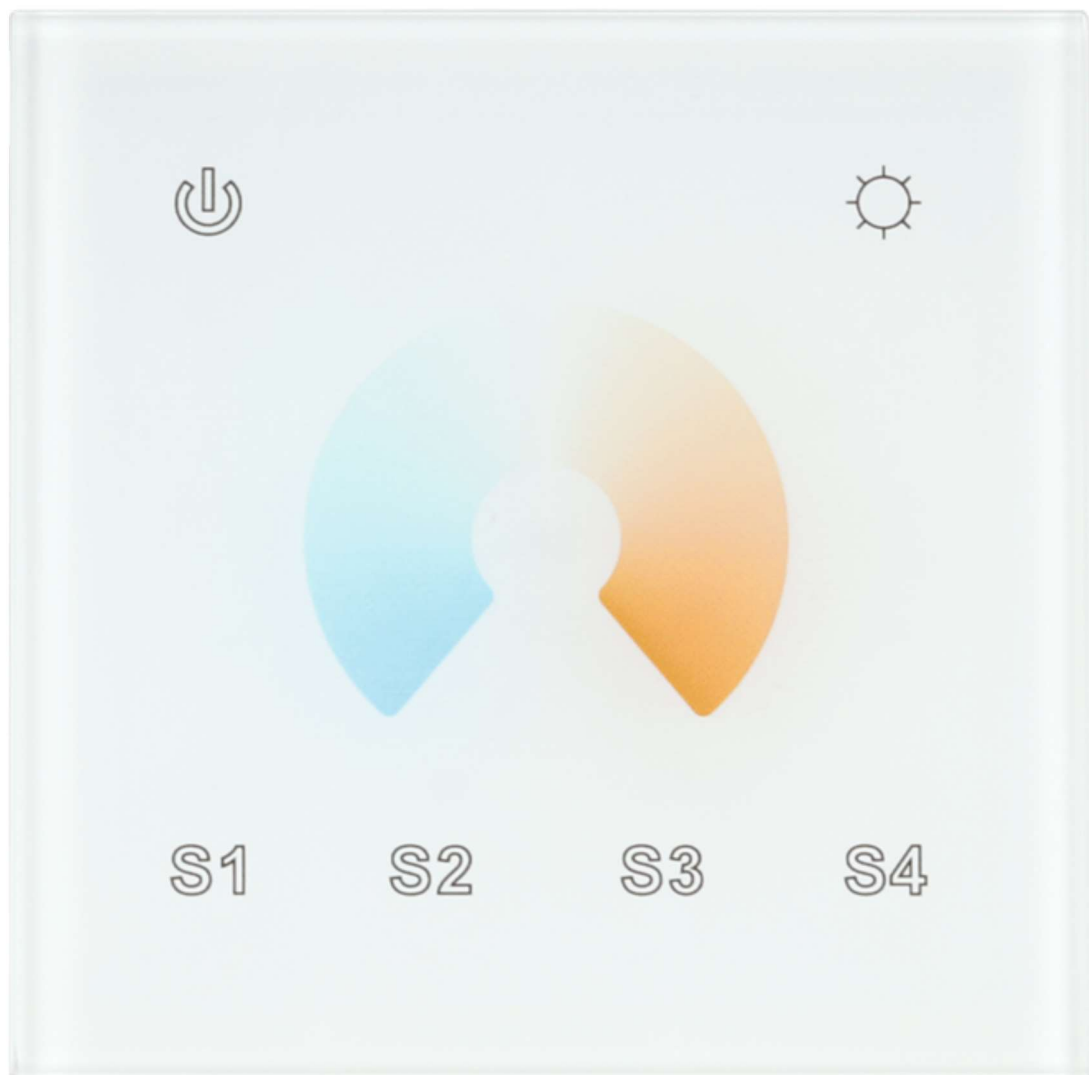

The PROLED RF DW wall remote controller is a dynamic white touch controller with sensitive glass touch panel, designed for wall mounting. It controls in combination with the **RF PWM DIMMER 4-CHANNEL / RF PWM DIMMER IP65 4-CHANNEL** Dynamic White applications without intensive installation work. It allows an easy mixing of different colour temperatures.

- selection of the desired colour temperatures with a colour wheel
- saving of 4 different light colours
- dimming of the desired colour temperature
- each zone can be connected to endless RF PWM DIMMERS
- each RF PWM DIMMER can be controlled by max. 8 RF remote controllers
- 868 MHz

PROLED RF DW REMOTE CONTROLLER WALL MANUAL (478.9 KB)

5 YEARS WARRANTY INFORMATION

TECHNICAL DATA

Power source	12–24 V (not included)
Operating temperature range	-10° C till +45° C
Dimension (w x d x h)	86 x 12 x 86 mm (depth incl. terminal block 31 mm)
Weight	0,13 kg

PRODUCT TYPES

order code	description
L513179	RF DW REMOTE CONTROLLER WALL

MEMBER OF THE PROLED GROUP