
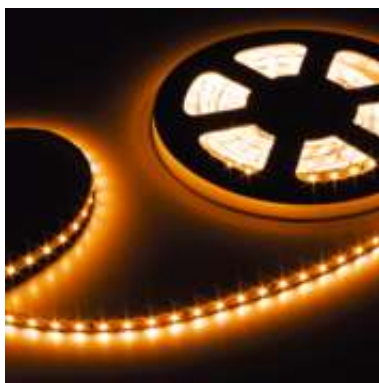
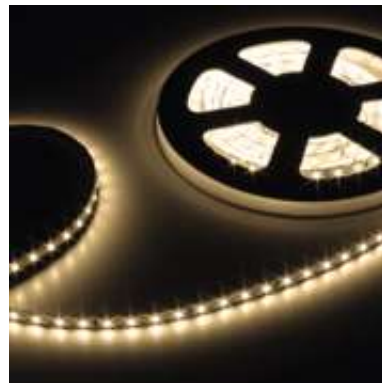



Flex Strip 400 Mono

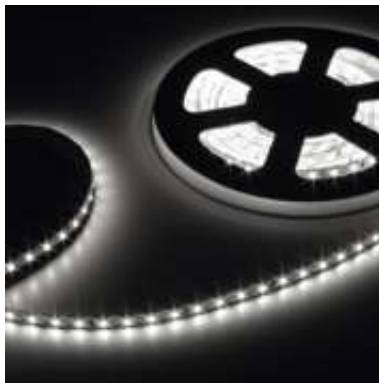

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED

FLEX STRIPS offer a wide spectrum of application possibilities.

- High flexibility – adaptable to round shapes
- Installation with 3M adhesive tape on the strip's backside (self adhesive).
- dimmable and controllable via DMX 512, DALI, KNX, 1-10 V, CASAMBI, RF by MULTI power supplies/controller

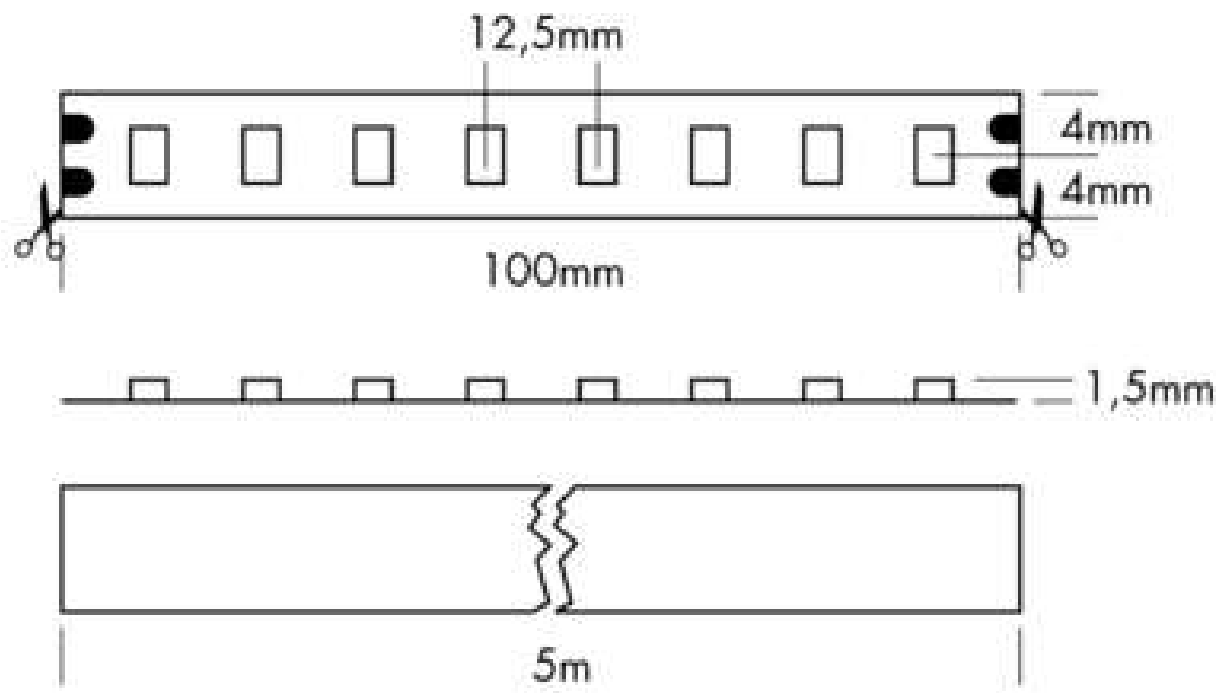

[PROLED FLEX STRIP IP20+IP53+IP68 MANUAL \(1.3 MB\)](#)

[EULUMDAT/IES INFORMATION](#)

[ORDER EXAMPLE SPECIAL LENGTHS](#)

[5 YEARS WARRANTY INFORMATION](#)

["UL-LISTED" INFORMATION](#)

["REEL TO REEL" INFORMATION](#)

TECHNICAL DATA

IP classification	IP20
Power source	24 VDC
Electrical connection	2x cable with 2-PIN to open wires
Maximum quantity per power input	5 m
Average lifetime*	50.000 h at L80/B10

Operating temperature range	-10° C till +45° C
Width x height	8 x 1,5 mm
min. Bending radius	20 mm
Cuttable	all 8 LEDs (10 cm)

*With correct installation and a suitable thermal management.

PHOTOMETRIC DATA

LED type	SMD LEDs
Luminous flux	white 700 Lumen per m neutral white 700 Lumen per m warm white 650 Lumen per m super warm white 600 Lumen per m ultra warm white 550 Lumen per m ambiance white 450 Lumen per m
Colour temperature	white 6000 K neutral white 4000 K warm white 3000 K super warm white 2700 K ultra warm white 2400 K ambiance white 2100 K
CRI	90
Beam angle	120°

Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.

PRODUCT TYPES

order code	colour	length	LED pcs	LED power	power consumption*	weight	EEC
L64904	white	500 cm	400	25 Watt	24 Watt	0,09 kg	E
L64908	neutral white	500 cm	400	25 Watt	24 Watt	0,09 kg	E
L64906	warm white	500 cm	400	25 Watt	24 Watt	0,09 kg	E
L64926	super warm white	500 cm	400	25 Watt	24 Watt	0,09 kg	E
L64936	ultra warm white	500 cm	400	25 Watt	24 Watt	0,09 kg	F
L64946	ambiance white	500 cm	400	25 Watt	24 Watt	0,09 kg	G

Custom length. More information about special length and customizing see [HERE](#).

L64904Z	white	per meter (max. 5 m)	80 per m	5 Watt per m	max. 5 Watt per m	0,02 kg	E
L64908Z	neutral white	per meter (max. 5 m)	80 per m	5 Watt per m	max. 5 Watt per m	0,02 kg	E
L64906Z	warm white	per meter (max. 5 m)	80 per m	5 Watt per m	max. 5 Watt per m	0,02 kg	E
L64926Z	super warm white	per meter (max. 5 m)	80 per m	5 Watt per m	max. 5 Watt per m	0,02 kg	E

order code	colour	length	LED pcs	LED power	power consumption*	weight	EEC
L64936Z	ultra warm	per meter	80	5 Watt	max. 5 Watt per	0,02	F
	white	(max. 5 m)	per m	per m	m	kg	
L64946Z	ambiance	per meter	80	5 Watt	max. 5 Watt per	0,02	G
	white	(max. 5 m)	per m	per m	m	kg	

*Actual power consumption

MEMBER OF THE PROLED GROUP