


SOL CL-M Round



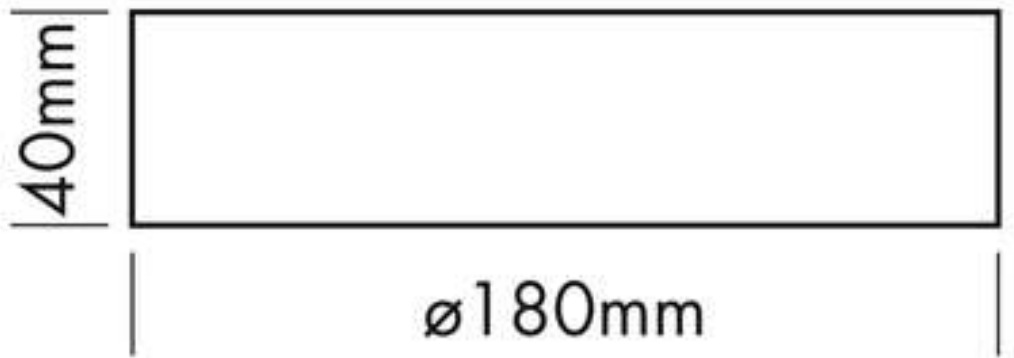

[PROLED SOL CL MANUAL \(393.7 KB\)](#)

[PROLED DOWNLIGHT SOL CL MANUAL \(350.0 KB\)](#)

[EULUMDAT/IES INFORMATION](#)

[5 YEARS WARRANTY INFORMATION](#)

TECHNICAL DATA

IP classification	IP40
Power source	220-240 VAC 50/60 Hz
Housing	metal frame white, panel PMMA white opal
Driver	including (500 mA / 18 V)
Electrical connection	2-PIN terminalblock
Average lifetime	50.000 h at L80/B10
Operating temperature range	-10° C till +45° C
Dimmable	optional with special constant current dimmer or driver

PHOTOMETRIC DATA

LED type	SMD LEDs
Luminous flux	neutral white 950 Lumen warm white 900 Lumen
Colour temperature	neutral white 4000 K warm white 3000 K
CRI	80
Beam angle	120°

Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.

PRODUCT TYPES

order code	colour	LED power	power consumption*	weight	EEC
L710SCM08R	neutral white	9 Watt	12,5 Watt	0,67 kg	F
L710SCM06R	warm white	9 Watt	12,5 Watt	0,67 kg	E

*Actual power consumption

MEMBER OF THE PROLED GROUP