

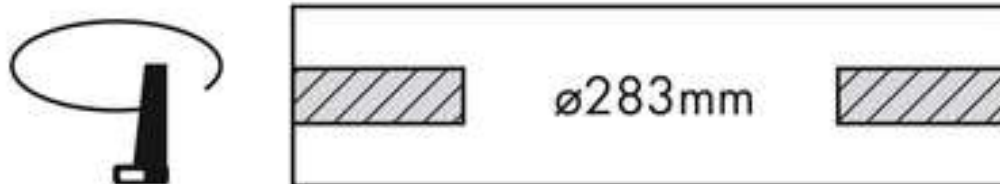


PROLED[®]

SOL DL-XL Round

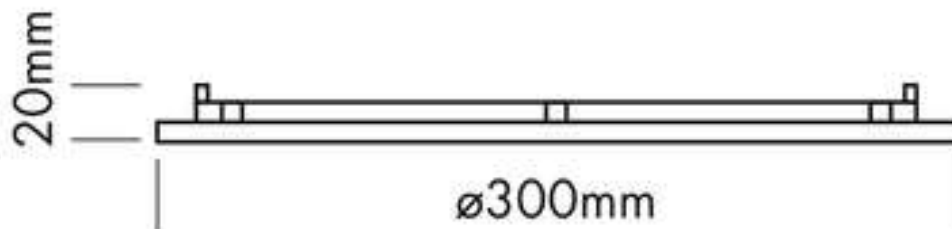

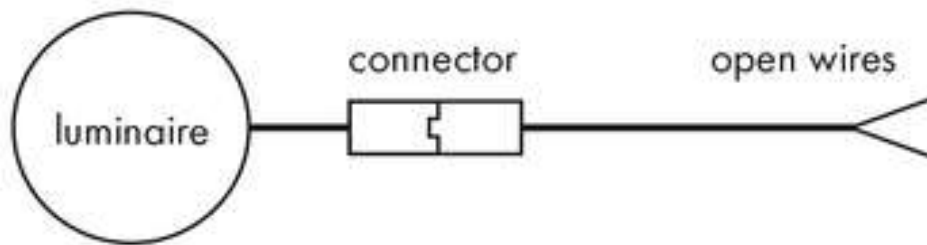

[PROLED DOWNLIGHT SOL DL MANUAL \(379.8 KB\)](#)

[EULUMDAT/IES INFORMATION](#)

[5 YEARS WARRANTY INFORMATION](#)

TECHNICAL DATA

IP classification	IP40
Power source	constant current 1050 mA / 25 V
Housing	metal frame white, panel PMMA white opal
Driver	1050 mA / 25 V (optional)
Electrical connection	1x cable with 2-PIN to open wires (with connector for easy installation)
Average lifetime	50.000 h at L80/B10
Operating temperature range	-10° C till +45° C

Dimmable with special constant current dimmer or driver

PHOTOMETRIC DATA

LED type	SMD LEDs
----------	----------

Luminous flux	neutral white 2800 Lumen
	warm white 2750 Lumen

Colour temperature	neutral white 4000 K
	warm white 3000 K

CRI	80
-----	----

Beam angle	120°
------------	------

Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.

PRODUCT TYPES

order code	colour	LED power	power consumption*	weight	EEC
L710SDX08R	neutral white	26 Watt	26 Watt	1 kg	E
L710SDX06R	warm white	26 Watt	26 Watt	1 kg	E

*Actual power consumption

MEMBER OF THE PROLED GROUP