

Switch


1-gang 2-way switch, Jussi, 2 X-terminals

Type: 1066A4

GTIN: 6418677307515



Surface mounting switch with screwless terminals and rocker with clip-on fastening. The terminals are for max 2 rigid wires. X-terminals are for extending the wires.

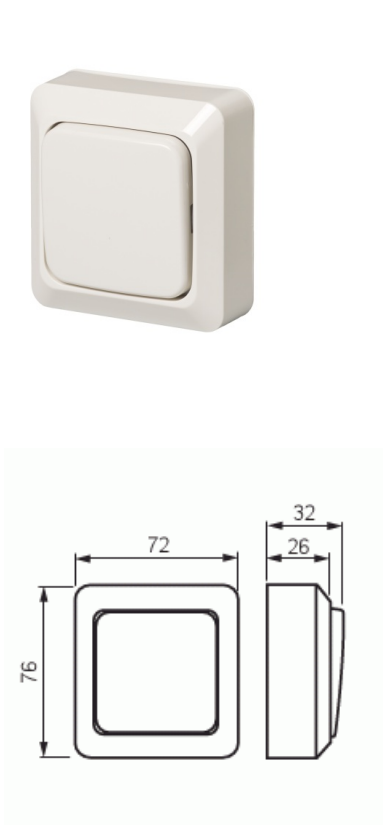

Technical specification

General Information

Product ID:	2TKA000190G1
-------------	--------------

Electrical quantities

Rated current:	16 AX
Rated voltage:	250 V

Classification

Enclosure class:	IP21
------------------	------



Packing

Package:	10/100
Unit:	PCS

ETIM Data

Wiring system:	Series switch
Method of operation:	Rocker/button
Assembly arrangement:	Basic element
Push button switch:	No
Number of rockers:	2
Mounting method:	Flush mounted (plaster)
Type of fastening:	Screw mounting
With mounting plate:	No
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Yes
Anti-bacterial treatment:	No
Surface protection:	Galvanized
Surface finishing:	Glossy
Colour:	White
RAL-number (similar):	9010
Label space/information surface:	No
Illumination:	No
Suitable for degree of protection (IP):	IP20
Nominal voltage:	250 V
Rated current:	16 A
Switching current for fluorescent lamps:	16 AX
Feedback-signal contact:	No
Washing machine switch:	No
Device width:	70 mm
Device height:	70 mm
Device depth:	26 mm
Built-in depth:	18 mm



Min. depth of built-in installation box:	18 mm
--	-------