




Switching Power Supplies Dimmable

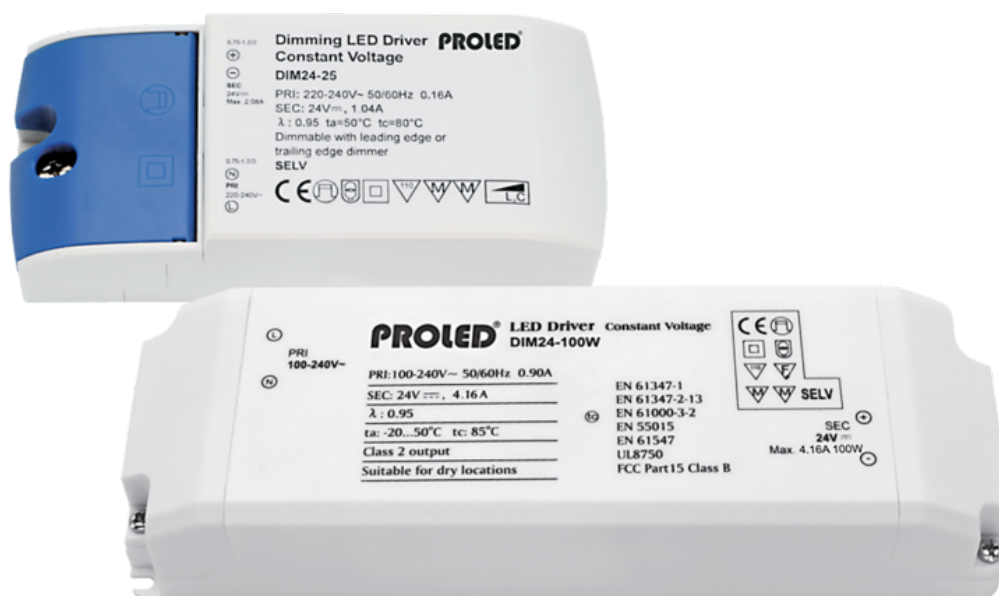

Dimmable switching power supplies. Can be dimmed with standard phase-cut dimmer with leading edge or trailing edge (triac). With MM-sign. Can be mounted on inflammable subsurface. Noiseless – without fan.

[PROLED SWITCHING POWER SUPPLIES GENERAL MANUAL \(187.4 KB\)](#)

[5 YEARS WARRANTY INFORMATION](#)

TECHNICAL DATA

Frequency range	50/60 Hz
-----------------	----------

PRODUCT TYPES

order code	output voltage	power	MM	power source	dimensions (l x w x h)	weight
L5201202DT	12	25	yes	220-	122 x 52 x	0,11
	VDC	Watt		240	30 mm	kg
				VAC		
L5202402DT2G	24	25	yes	220-	122 x 52 x	0,11
	VDC	Watt		240	30 mm	kg
				VAC		
L5202405DT2G	24	50	yes	220-	184 x 61 x	0,25
	VDC	Watt		240	32 mm	kg
				VAC		
L5202410DT2G	24	100	yes	220-	210 x 67 x	0,38
	VDC	Watt		240	34 mm	kg
				VAC		

MEMBER OF THE PROLED GROUP