




Switching Power Supplies Constant Current 4G

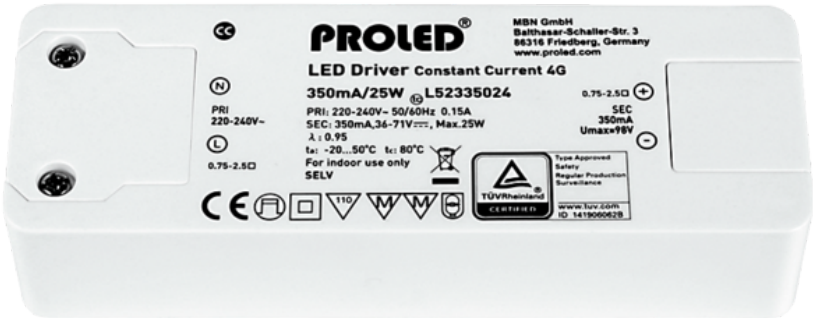

Constant current power supplies with MM-sign and F-sign. Flicker-Free. Can be mounted on inflammable subsurface. Noiseless – without fan.

PROLED SWITCHING POWER SUPPLIES GENERAL MANUAL (187.4 KB)

5 YEARS WARRANTY INFORMATION

TECHNICAL DATA

Frequency range	50/60 Hz
-----------------	----------

PRODUCT TYPES

order code	output current	output voltage	power	power range	MM	power source	dimensions (l x w x h)	weight
L52330014	300	25-50	15	7,5-	yes	220-	110 x 42 x	0,05
	mA	VDC	Watt	15		240	22 mm	kg
				Watt		VAC		
L52335014	350	21-42	15	7,5-	yes	220-	110 x 42 x	0,05
	mA	VDC	Watt	15		240	22 mm	kg
				Watt		VAC		
L52335024	350	36-71	25	12,5-	yes	220-	127 x 43 x	0,10
	mA	VDC	Watt	25		240	28 mm	kg
				Watt		VAC		
L52350024	500	25-50	25	12,5-	yes	220-	127 x 43 x	0,10
	mA	VDC	Watt	25		240	28 mm	kg
				Watt		VAC		
L52370024	700	18-36	25	12,5-	yes	220-	127 x 43 x	0,10
	mA	VDC	Watt	25		240	28 mm	kg
				Watt		VAC		
L52370044	700	29-57	40	20-	yes	220-	127 x 43 x	0,13
	mA	VDC	Watt	40		240	28 mm	kg
				Watt		VAC		
L52310044	1050	19-38	40	20-	yes	220-	127 x 43 x	0,13
	mA	VDC	Watt	40		240	28 mm	kg

order code	output current	output voltage	power	power range	MM	power source	dimensions (l x w x h)	we
				Watt		VAC		
L52310064	1050	40-57	60	30,5-	yes	220-	127 x 43 x	0,18
	mA	VDC	Watt	60		240	28 mm	kg
				Watt		VAC		
L52312064	1200	35-50	60	30,5-	yes	220-	127 x 43 x	0,18
	mA	VDC	Watt	60		240	28 mm	kg
				Watt		VAC		

MEMBER OF THE PROLED GROUP