



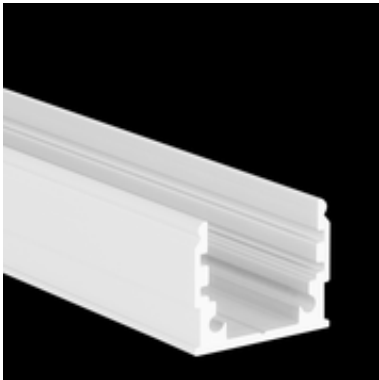
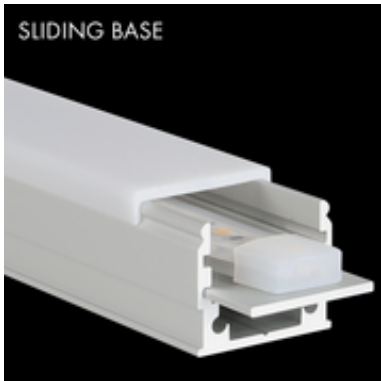


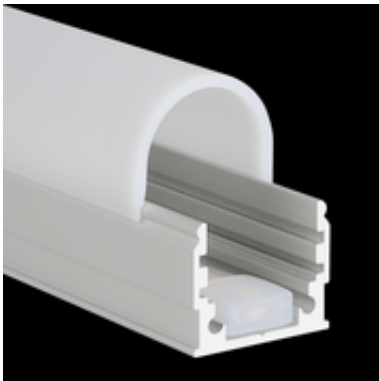

Aluminium Profile O-Line Standard

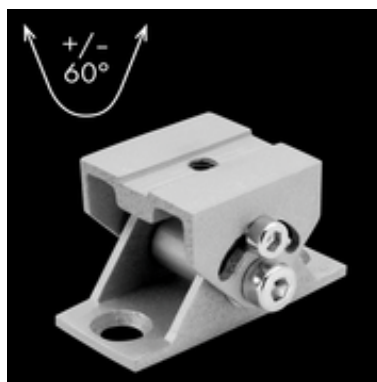

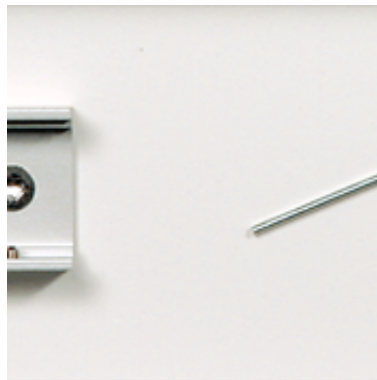

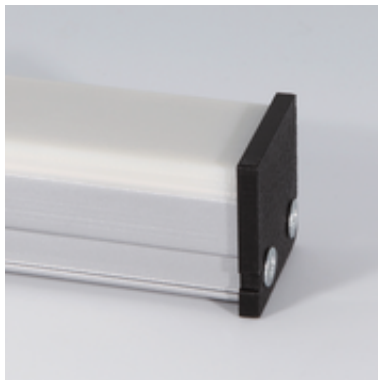

The PROLED aluminium profiles are the perfect addition to the PROLED FLEX STRIPS. The FLEX STRIPS can be glued into the profile. The aluminum profiles are in anodized aluminium or white RAL 9016 available. The profile can simply be sawn to any required length or ordered in the required custom length. Different versions of Aluminium profiles and different shapes of plastic covers are available. In addition we offer a wide range of accessories.

O-LINE STANDARD

Two different shapes of high quality plastic covers are available:


flat and round

Each of the two shapes are available in crystal clear, frost (semitransparent) and milky frost (opal).


The covers are overlapping the O-Line aluminum profile at the outside. Thus less dirt and water can enter the profile. Combined with IP68 or IP67 FLEX STRIP they are ideal for outdoor use.

All PROLED aluminium profiles, plastic covers and end caps are protected by registered community designs (international design patents).


PROFILE

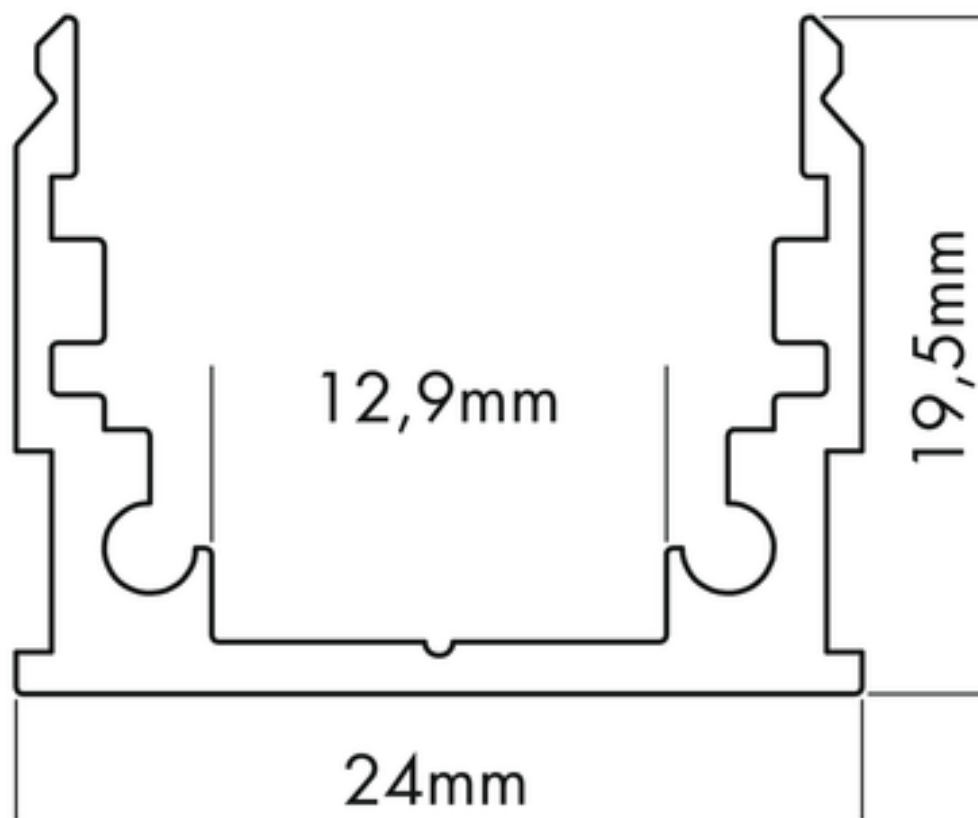

SLIDING BASE

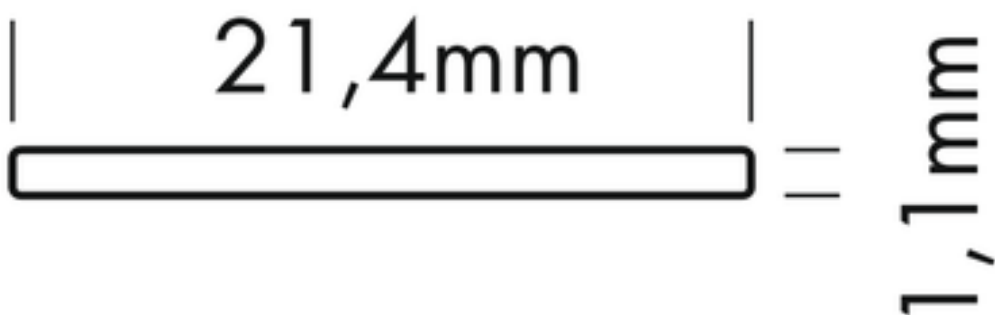

SWIVELLING HOLDER

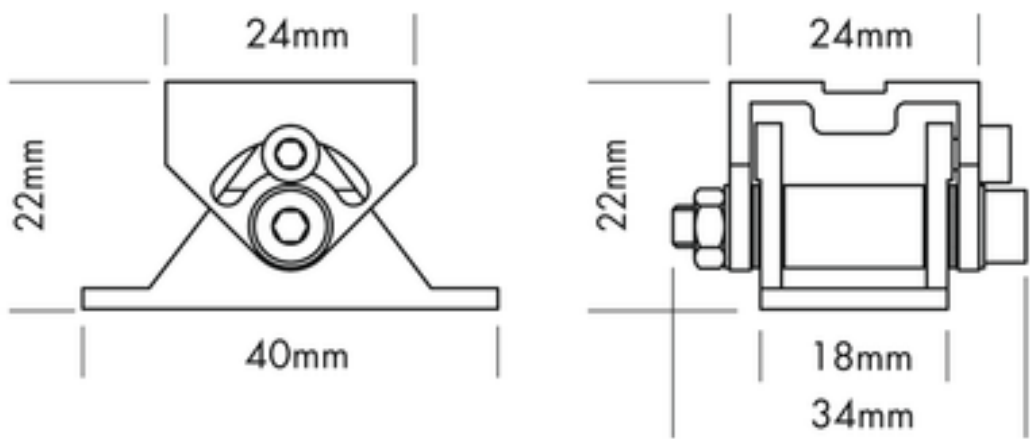

ORDER EXAMPLE SPECIAL LENGTHS

5 YEARS WARRANTY INFORMATION

COMPATIBILITY ALUMINIUM PROFILE O-LINE STANDARD AND STRIPS

This list shows only the compatibility based on the dimensions. The thermal compatibility depends on the installation and surroundings. End caps and supply connectors are not taken into account in the compatibility based on the dimensions.

DMX STRIP 30	×
FLEX STRIP 300 + SUNLIKE 300**	×
FLEX STRIP 300 THIN	×
FLEX STRIP 400	×
FLEX STRIP 600 + SUNLIKE 600**	×
FLEX STRIP 600 CC	×
FLEX STRIP 800	×
FLEX STRIP 800 EXTRA BRIGHT	×
FLEX STRIP 1200 SINGLE	×
FLEX STRIP 1200 DOUBLE**	⊗

FLEX STRIP 2160 QUATTRO**	—
FLEX STRIP 300 HE+**	×
FLEX STRIP 400 HE+	×
FLEX STRIP 600 HE+	×
FLEX STRIP 800 HE+	×
FLEX STRIP 1200 HE** / HE+	×
FLEX STRIP 2216	×
FLEX STRIP 2110 UHD**	×
FLEX STRIP COB LP	×
FLEX STRIP COB	×
FLEX STRIP HD**	×
FLEX STRIP HD SINGLE CUT**	×
FLEX STRIP HD POWER**	—
FLEX STRIP 5630**	×
FLEX STRIP Xtend	⊗
FLEX STRIP 5630 HE+	×
FLEX STRIP 900 FOOD	×
FLEX STRIP DIM-TO-WARM 1200	×
FLEX STRIP DW**	×
FLEX STRIP DW 2-IN-1	×
FLEX STRIP DW 3-IN-1**	×
FLEX STRIP COB DW	×
FLEX STRIP RGB**	×
FLEX STRIP HD RGB	×
FLEX STRIP HD+ RGB	×
FLEX STRIP 3535 RGB	×

FLEX STRIP Xtend RGB	⊗
FLEX STRIP RGBA 4-IN-1	×
FLEX STRIP RGBA**	×
FLEX STRIP RGBW 4-IN-1	×
FLEX STRIP RGBW	×
FLEX STRIP Xtend RGBW	⊗
FLEX STRIP RGBAW	×
FLEX STRIP RGB+CCT 5-IN-1	×
FLEX STRIP HD RGB+CCT 5-IN-1	×
FLEX STRIPS DIGITAL	×

⊗ = can only be used together with the SLIDING BASE

** = listed in catalogue "DISCONTINUED EOL PRODUCTS 2023"

COMPATIBILITY ALUMINIUM PROFILE O-LINE STANDARD AND STRIPS

This list shows only the compatibility based on the dimensions. The thermal compatibility depends on the installation and surroundings. End caps and supply connectors are not taken into account in the compatibility based on the dimensions.

FLEX STRIP IP62 400	×
FLEX STRIP IP62 800	×
FLEX STRIP IP53 300**	×
FLEX STRIP IP53 400	×
FLEX STRIP IP53 600**	×
FLEX STRIP IP53 800	×
FLEX STRIP IP53 300 HE** / HE+**	×
FLEX STRIP IP53 400 HE+	×
FLEX STRIP IP53 600 HE** / HE+**	×

FLEX STRIP IP53 800 HE+	×
FLEX STRIP IP53 1200 HE** / HE+	×
FLEX STRIP IP53 HD**	×
FLEX STRIP IP53 DW 2-IN-1	×
FLEX STRIP IP53 RGB**	×
FLEX STRIP IP53 HD RGB	×
FLEX STRIP IP54 EXTENDED 700**	⊗
FLEX STRIP IP68 300	×
FLEX STRIP IP68 400	×
FLEX STRIP IP68 600**	×
FLEX STRIP IP68 800	×
FLEX STRIP IP68 1200 DOUBLE**	—
FLEX STRIP IP68 300 HE+**	⊗
FLEX STRIP IP68 400 HE+	⊗
FLEX STRIP IP68 600 HE** / HE+**	×
FLEX STRIP IP68 800 HE+	⊗
FLEX STRIP IP68 1200 HE** / HE+	⊗
FLEX STRIP IP68 HD**	⊗
FLEX STRIP IP65 Xtend	⊗
FLEX STRIP IP65 900 FOOD	⊗
FLEX STRIP IP65 WELLNESS	×
FLEX STRIP IP68 RGB	⊗
FLEX STRIP IP68 HD RGB	⊗
FLEX STRIP IP68 RGBW 4-IN-1	⊗
FLEX STRIP IP68 RGB+CCT 5-IN-1	⊗
FLEX STRIP IP68 HD RGB+CCT 5-IN-1	⊗

FLEX STRIP IP65 DIGITAL	⊗
FLEX STRIP OPAL BERLIN	×
FLEX STRIP OPAL HAMBURG	—
FLEX STRIP OPAL LONDON	—
FLEX STRIP OPAL LIVERPOOL	—
FLEX STRIP OPAL MILAN	—
FLEX STRIP OPAL SIDE VIEW	—
FLEX STRIP OPAL 360	—
FLEX STRIP XTREME MONO	⊗
FLEX STRIP XTREME RGB	⊗

⊗ = can only be used together with the SLIDING BASE

** = listed in catalogue "DISCONTINUED EOL PRODUCTS 2023"

PRODUCT TYPES

order code	description	length
L69K000	ALUMINIUM PROFILE O-LINE STANDARD	2 m
L69K000X	ALUMINIUM PROFILE O-LINE STANDARD	3 m
L69K000Z	ALUMINIUM PROFILE O-LINE STANDARD	per meter (max. 3 m)*
L69K000W	ALUMINIUM PROFILE O-LINE STANDARD white**	2 m
L69K000WZ	ALUMINIUM PROFILE O-LINE STANDARD white**	per meter (max. 2 m)*
L690SBS	ALUMINIUM SLIDING BASE M-LINE / O-LINE	2 m
L690SBSZ	ALUMINIUM SLIDING BASE M-LINE / O-LINE	per meter (max. 2 m)*
L690SBSW	ALUMINIUM SLIDING BASE M-LINE / O-LINE white**	2 m
L690SBSWZ	ALUMINIUM SLIDING BASE M-LINE / O-LINE white**	per meter (max. 2 m)*

order code	description	length
L690S3E	ALUMINIUM END CAP FLAT M-LINE STANDARD / O-LINE	-
L690S3EW	ALUMINIUM END CAP FLAT M-LINE STANDARD / O-LINE white**	-
L690S3EL	ALUMINIUM END CAP FLAT M-LINE HOLE STANDARD / O-LINE	-
L690S3EWL	ALUMINIUM END CAP FLAT M-LINE HOLE STANDARD / O-LINE white**	-
L690R2E	ALUMINIUM END CAP ROUND M-LINE STANDARD / O-LINE	-
L690R2EW	ALUMINIUM END CAP ROUND M-LINE STANDARD / O-LINE white**	-
L69KRPEB	ABS PLASTIC END CAP ROUND O-LINE STANDARD black	-
L69KRPEG	ABS PLASTIC END CAP ROUND O-LINE STANDARD grey	-
L69KRPEW	ABS PLASTIC END CAP ROUND O-LINE STANDARD white	-
L69KSPEB	ABS PLASTIC END CAP FLAT O-LINE STANDARD black	-
L69KSPEG	ABS PLASTIC END CAP FLAT O-LINE STANDARD grey	-
L69KSPEW	ABS PLASTIC END CAP FLAT O-LINE STANDARD white	-
L690006	ALUMINIUM SWIVELLING HOLDER silver 1 pcs	-
L690006W	ALUMINIUM SWIVELLING HOLDER white** 1 pcs	-
L690001	ALUMINIUM PROFILE SET MOUNTING M-LINE STANDARD + LOW / O-LINE Set includes: 3x Mounting Clip + 1x Allen key	-
L690001W	ALUMINIUM PROFILE SET MOUNTING white** M-LINE STANDARD + LOW / O-LINE Set includes: 3x Mounting Clip + 1x Allen key	-

***Custom Length** / **white RAL 9016

MEMBER OF THE PROLED GROUP