


## LED waterproof light fitting

**MODUS PL 2500, narrow body 1275mm, LED 830 , body PE, opal PC cover, IP65, driver 700mA**

**Code:** PL2500M1N3ND

**EAN:** 8596099000844

This product contains a light source with energy efficiency class D

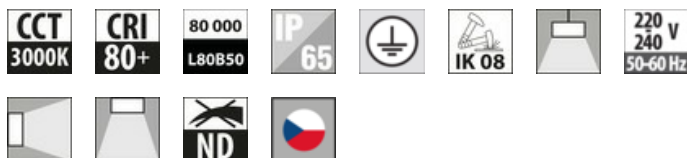

## Luminaire properties

Product category:	<b>Ceiling / wall luminaires</b>	Effective luminous flux (lm):	<b>3100</b>
System power (W):	<b>20</b>	Luminaire efficacy (lm/W):	<b>155</b>
Rated lifetime L80/B50 (h):	<b>80000</b>	Degree of protection (IP):	<b>IP65</b>
Color housing:	<b>Grey</b>	Impact strength:	<b>IK08</b>
Suitable for suspended mounting:	<b>Yes</b>		
Material housing:	<b>Plastic</b>		
Light source included:	<b>Yes</b>	Suitable for wall mounting:	<b>Yes</b>
Suitable for surface mounting:	<b>Yes</b>	Rated ambient temperature (°C):	<b>-10...+45</b>
Suitable for ceiling mounting:	<b>Yes</b>	Made in Czech republic:	<b>Yes</b>

## Light source

Light source type:	<b>LED</b>	Color temperature (K):	<b>3000</b>
Color rendering index CRI:	<b>80-89</b>	Replaceability:	<b>Replaceable light source by professional, replaceable ballast</b>
Light source type:	<b>1990540183006</b>	Energy efficiency class:	<b>D</b>

**Optical system**

Optical system:	CO	Light outlet:	Direct
Light sharing:	Symmetric	Material cover:	Plastic, opal

**Dimensions**

Length (mm):	1275	Width (mm):	84
Height/depth (mm):	100	Size version:	M
Weight (kg):	2		

**Electrical values**

Protection class:	I	Voltage type:	AC
Type of control gear:	LED operating device current-controlled	Nominal voltage (V):	220...240
Control gear included:	Yes	No dim function:	Yes
Indoor use only:	Yes		