


Download

DXF 2D
- 1998w.dxf
3DS
- disano_1998_minirodio.3ds
3DM
- disano_1998_minirodio.3dm
Montaggi
- MINIRODIO.pdf



1998 Mini Rodio - COB asymmetric

Housing: in die-cast aluminium with cooling fins.
Reflector: in high-grade 99,99 aluminium with PVD treatment.
Diffuser: 5mm thick tempered glass, resistant to thermal shocks and impacts.
Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.
On request: coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments.
Equipment: complete with electrical cable for mains connection L=0,6m
Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve. Power factor: 0,9.
Photobiological risk: exempt, pursuant to EN62471. Luminous flux maintenance 80%: 50000h (L80B20)
Wind surface: L:242cm² F:807cm².

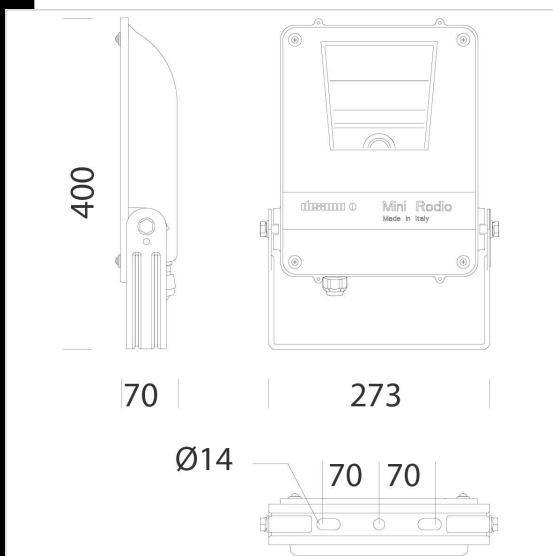

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
414850-00	CLD CELL	3.03	LED COB-4971lm-4000K-CRI 80	39 W	GRAFITE
414850-39	CLD CELL	2.65	LED COB-4721lm-3000K-CRI 80	39 W	GRAFITE
414851-00	CLD CELL	3.03	LED COB-6236lm-4000K-CRI 80	51 W	GRAFITE
414851-39	CLD CELL	2.96	LED COB-5924lm-3000K-CRI 80	51 W	GRAFITE
414852-00	CLD CELL	3.05	LED COB-7153lm-4000K-CRI 80	66 W	GRAFITE
414852-39	CLD CELL	3.03	LED COB-6724lm-3000K-CRI 80	66 W	GRAFITE

Accessories



- 333 pole mounting diam.60



- 334 pole mounting diam. 76

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated