


Download

DXF 2D
- 1713.dxf

3DS
- disano_1713_cripto_medium.3ds

3DM
- disano_1713_cripto_medium.3dm

Montaggi
- crypto.pdf

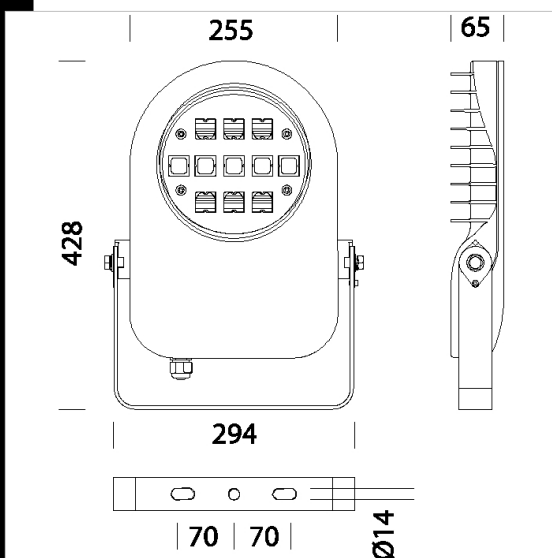

1713 Cripto medium - asymmetric

New technical tools are capable of creating a unique symbiosis between light and architecture. Technical advancements and the use of LEDs enable to highlight historical monuments or new infrastructure with minimally invasive systems without altering original colours or materials. With light we can therefore illuminate and enhance cultural heritage and landmarks to help define the identity of a place. Disano presents Cripto, a spotlight designed to be a possible retrofit solution for more classic models. The excellent performance of this spotlight in terms of energy savings and luminous efficiency combine with a long life of 80000 hours and materials with IP66 protection for outdoor installation. In addition to latest generation LED sources, which guarantee 11880 Lumen, as well as a suitable colour temperature without changing the perception of materials (4000K) and a very good colour rendering (CRI 80)

Its advanced technology and functional design are conceived to reduce consumptions and fulfil the increasing need to replace obsolete fixtures and meet the growing attention towards energy savings.

HOUSING: in die-cast aluminium with cooling fins.

DIFFUSER: tempered glass, 4 mm thick, resistant to thermal shock and impacts.

COATING: the first stage includes grey epoxy e-coating, resistant to corrosion and saline environments. Then the fixture is coated with an acrylic based UV-stabilised resin

STANDARD SUPPLY: complete with galvanised and coated bracket. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: protection up to 10KV. Acetic acid salt spray coating pursuant to standard UNI EN ISO 9227 "Corrosion Tests in Artificial Atmosphere". Upon request: with dimmable power supply 1-10V.

OPTICS: asymmetric highly efficient secondary PMMA lens combined with flux recovery system in high-performance polycarbonate.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP66IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces.

LED: Latest generation LED technology, : 11880lm - 4000K - 700mA - 86W - CRI 80 - Ta-20 +40°C. Surge protector 4/6Kv. Low flicker

Photobiological safety class: exempt group EN62471

Power factor: >= 0.9

Luminous flux maintenance 80%: 80000h (L80B10)

Wind surface: L:205cm² F:855cm².

Code	Gear	Kg	Watt	Base	Lamps	Colour
413030-00	CLD CELL	4.90	LED white 86W		11880lm-4000K-CRI 80	GRAPHITE
413031-00	CLD CELL	4.90	LED white 86W		11880lm-4000K-CRI 80	SANDBLASTED SILVER

Accessories



- 306 protection guard