



# STYX 1,2,3,4

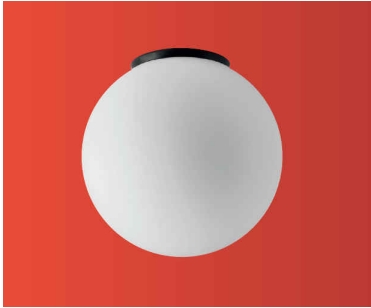

## TECHNICAL DATA

Light source	LED module Osmont L05C, L06C	incandescent lamp
Chromaticity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	Tridonic, TCI	-
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Energy class	A++	by source
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Input voltage	230V	
IP	IP65	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Fixture	plastic	
Color of fixture	white (B), black (C), silver (S), chrome (CR), brass (MS)	
Shade	three layers glass with matt surface	
Shade attachment	with bayonet	
Mounting	on the wall (STYX 1,2,3), on the ceiling	
Applications	housing constructions (rooms, corridors), cultural premises	

## VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility DIM (DALI)
			3000K	4000K	3000K	4000K	
STYX 1	LED-5L05C05BD1/192 x .000	9	1070	1130	950	1000	-
STYX 2	LED-5L05C05BD1/193 x .000	9	1070	1130	950	1000	-
STYX 3	LED-5L06C04BD1/194 x .000	22	2970	3130	2610	2760	*
STYX 4	LED-5L06C06BD1/196 x .000	29	3900	4110	3430	3620	*

x – color (B – white, C – black), S – silver, CR – chrome, MS – brass  
.000 – 3000K or 4000K


STANDARD:

	Type	Input [W]	Socket
STYX 1	IN-12BD1/192 x	25	E27
STYX 2	IN-12BD1/193 x	40	E27
STYX 3	IN-12BD1/194 x	60	E27
STYX 4	IN-12BD1/196 x	75	E27

x – color (B – white, C – black), S – silver, CR – chrome, MS – brass

## DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

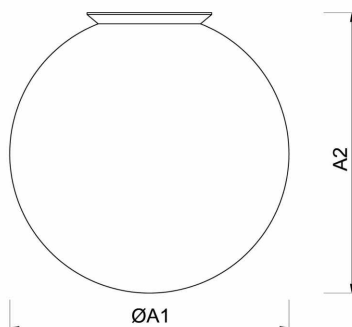

	ØA1 [mm]	A2 [mm]
STYX 1	200	200
STYX 2	250	250
STYX 3	300	300
STYX 4	400	400

MOUNTING DIMENSIONS [mm]:

