

START eco Flood Flat PIR  
START eco Flood Flat IP54 PIR 4500lm 840 White  
0048243



Product features

- The new Start eco Flood Flat comes with improved design. The streamlined, durable, lightweight die-cast aluminium body makes it a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. White die-cast aluminum housing, white reflector, 4750 lm, 51 W, 93 lm/W, 4000K, drive current 193 mA, non dimmable, CRI>80, IP54, IK07 - fixture, IK05 - sensor, Class I, lumen maintenance L70:B50: 30000 hrs, 192 x 220 x 69 mm (L x W x H). Weight: 0.85kg. PIR sensor included. Energy class: A++ A+ A.



PRODUCT OVERVIEW


Product name	START eco Flood Flat IP54 PIR 4500lm 840 White
Technology	LED
Housing	Aluminium
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579521
Warranty	3 years
Useful luminous flux (Fuse)	4750
Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	93
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	51
Electrical protection	Class I
Housing colour	RAL 9003 - Signal white
IP rating	IP54
IK rating	IK05
Product EAN number	5410288482439

PHOTOMETRY

# START eco Flood Flat PIR

*START eco Flood Flat IP54 PIR 4500lm 840 White*

0048243

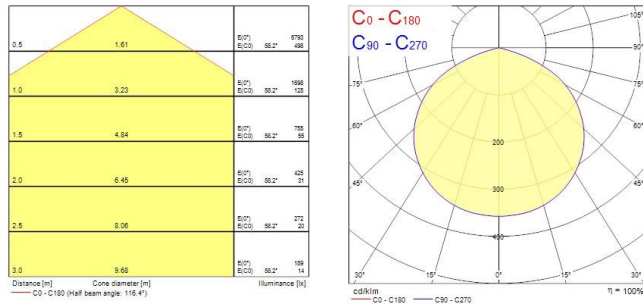

## TECHNICAL DRAWINGS

