


Start Flood without PIR

Start Flood IP65 7000LM 840 Black
0050166



Product features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 7000 lm, 58 W, 121 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 120000 hrs, 151 x 193 x 30 mm (L x W x H). Weight: 0.665 kg.

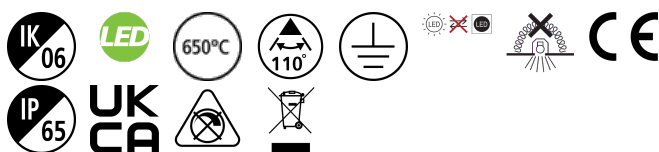


PRODUCT OVERVIEW

Product name	Start Flood IP65 7000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted, Ceiling surface mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579633
Warranty	3 years
Useful luminous flux (Fuse)	7000
Fixture luminous flux (lm)	7000
Luminaire efficacy (lm/W)	121
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	Not required
Dimmable	No
Dimming method	N/A
Housing colour	Black
IP rating	IP65
IK rating	IK06
Product EAN number	5410288501666

PHOTOMETRY

Start Flood without PIR

Start Flood IP65 7000LM 840 Black
0050166

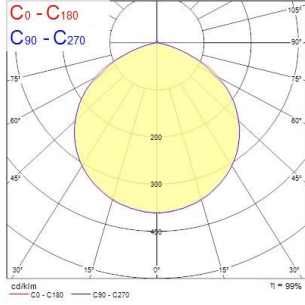

Distance [m]	Cone diameter [m]	E0° [lx]	E10° [lx]	E30° [lx]	E45° [lx]	E60° [lx]	E75° [lx]	E90° [lx]	E120° [lx]	E150° [lx]	E180° [lx]
0.5	1.45 3.50	1000*	872	666							
1.0	2.99 7.00	254	216	165							
1.5	4.48 10.50	112	97	75							
2.0	5.98 14.00	61	55	43							
2.5	7.47 17.50	46	41	32							
3.0	8.96 21.00	35	31	24							

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 112.9°)
— C90 - C270 (Half beam angle: 112.4°)

TECHNICAL DRAWINGS

