

Product Code 05-9926-Z5-CL Installation Instructions 3D File Photometry Dialux | ULD Revit (BIM)



# Clous 136mm

LedsC4 Team

Wall fixture IP66 Clous 136mm LED 11W LED warm-white 3000K ON-OFF Urban grey 537lm

#### Technical features

Luminaire total power: 11W

Real lumens: 537 Real lm/W: 49

Correlated Colour Temperature (CCT): LED warm-white 3000K

Lens / reflector angle: FLOOD 89° Structure material: Aluminium Structure finish: Urban grey Diffuser material: Glass Diffuser finish: Matt

Voltage / frequency: 100-240V/50-60Hz

Dimming protocol: ON-OFF

Power Factor: 0.90

Useful life: 50,000h L80B20

Warranty: 5 years

Resistant to marine environments: Yes

Easily recyclable luminaire













### Luminotechnic features

CRI: 80

MacAdam steps: 3

Photobiological risk: RGO

UGR crosswise: 25.7 UGR lengthwise: 23.6

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	9W	LED warm- white 3000K






Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Product Code 05-9926-Z5-CL Installation Instructions 3D File Photometry Dialux | ULD Revit (BIM)



# Clous 136mm

LedsC4 Team

Wall fixture IP66 Clous 136mm LED 11W LED warm-white 3000K ON-OFF Urban grey 537lm

### Logistics



Net weight (kg): 0.67

Packaged weight (kg): 0.8

Packaging: 155mm x 120mm x 70mm

## Light application

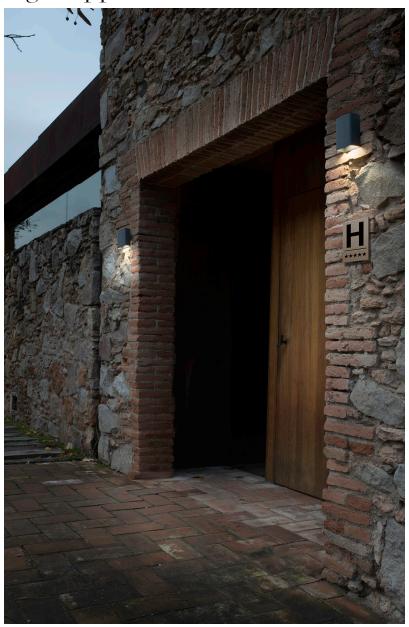


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.